

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

217584US2PCT

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/019290

INTERNATIONAL APPLICATION NO.

PCT/JP00/04442

INTERNATIONAL FILING DATE

4 July 2000

PRIORITY DATE CLAIMED

5 July 1999 (earliest)

TITLE OF INVENTION

AIR CLEANING DEVICE

APPLICANT(S) FOR DO/EO/US

ANNO Kenzo

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).



Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

PCT/IB/304/Drawings (14 sheets)

Notice of Priority/Form PTO-1449

Amended Sheets (Pages 1, 1a, 2, 2a, 4, 4a, 7, 7a, 9, 9a, 10, 28, 29, 30 and 30a)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 101.101) 10/019290		INTERNATIONAL APPLICATION NO. PCT/JP00/04442		ATTORNEY'S DOCKET NUMBER 217584US2PCT	
24. The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :					
<input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO				\$1040.00	
<input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO				\$890.00	
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO				\$740.00	
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)				\$710.00	
<input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)				\$100.00	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$890.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	34 - 20 =	14	x \$18.00	\$252.00	
Independent claims	4 - 3 =	1	x \$84.00	\$84.00	
Multiple Dependent Claims (check if applicable).			<input checked="" type="checkbox"/>	\$280.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,506.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$1,506.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,506.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).			<input type="checkbox"/>	\$0.00	
TOTAL FEES ENCLOSED =				\$1,506.00	
				Amount to be refunded	\$
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$1,506.00 to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 15-0030 A duplicate copy of this sheet is enclosed.					
d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Surinder Sachar Registration No. 34,423  22850			SIGNATURE  Marvin J. Spivak NAME 24,913 REGISTRATION NUMBER Jan 4 2002 DATE		

217584US

IN THE UNITED STATES PATENT & TRADEMARK OFFICE

IN RE APPLICATION OF :
KOJI ANNO : ATTN: APPLICATION DIVISION
SERIAL NO: NEW U.S. PCT APPLN :
(Based on PCT/JP00/04442)
FILED: HEREWITH :
FOR: AIR CLEANER

PRELIMINARY AMENDMENT

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Prior to a first examination on the merits, please amend the above-identified application as follows:

IN THE CLAIMS

Please amend the claims as follows:

1. (Amended) An air cleaning device comprising a bulb-shaped casing provided at one end with an attached portion to be attached to an attaching portion and at the other end with an outlet, and a negative ion generator accommodated in the casing, wherein the attached portion is connected to a commercial power source and negative ions are generated by discharge of the negative ion generator and released from the outlet.

2. (Amended) An air cleaning device comprising a bulb-shaped casing provided at one end with a fed portion to be attached to a feed portion and at the other end with an outlet, an AC/DC converter accommodated in the casing for converting an alternating current from

the fed portion into a direct current, a boosting transformer accommodated in the casing for boosting voltage from the AC/DC converter, and a negative ion generator accommodated in the casing to face the outlet and connected to the boosting transformer, wherein the fed portion is connected to a commercial power source, high voltage is applied from the boosting transformer to the negative ion generator to induce electrical discharge and generate negative ions, and the negative ions are released from the outlet.

3. (Amended) The air cleaning device according to claim 1 or claim 2, wherein the bulb-shaped casing comprises a casing body having one end provided with the fed portion and the other end made open and a lid having one end provided with the outlet and the other end fixed or detachably attached to the open end of the casing body.

4. (Amended) The air cleaning device according to claim 1 or claim 2, wherein the negative ion generator is constituted of a needle-like electrode having a distal end directed to a side of the outlet.

5. (Amended) The air cleaning device according to claim 2, wherein the DC/AC converter and the boosting transformer are made integral.

6. (Amended) The air cleaning device according to claim 1 or claim 2, wherein the bulb-shaped casing is provided at the other end with an illuminator.

7. (Amended) The air cleaning device according to claim 1 or claim 2, wherein the fed portion comprises a base to be attached to and detached from a socket.

8. (Amended) The air cleaning device according to claim 1 or claim 2, wherein the fed portion comprises a base having a pair of pins projecting from a peripheral surface in opposite directions.

9. (Amended) The air cleaning device according to claim 1 or claim 2, wherein the fed portion comprises a plug having a pair of blades or pins to be attached to and detached from an electrical receptacle.

10. (Amended) An air cleaning device comprising a bulb-shaped casing provided at one end with an attached portion to be attached to an attaching portion and at the other end with an outlet, accommodating an ozone generator, and formed with a portion for supplying air into the ozone generator, wherein the attached portion is connected to a commercial power source, the ozone generator induces electrical discharge to generate negative ions and ozone, and a stream of air containing the negative ions and ozone is released from the ozone generator to the outlet.

11. (Amended) An air cleaning device comprising a bulb-shaped casing provided at one end with a fed portion to be attached to a feed portion and at the other end with an outlet, an AC/DC converter accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer accommodated in the casing for boosting voltage from the fed portion, an ozone generator accommodated in the casing facing the outlet and connected to the boosting transformer, and an air supply portion formed in the casing for supplying air into the ozone generator, wherein the fed portion is connected to a commercial power source and high voltage is applied from the boosting transformer to the ozone generator to induce electrical discharge, generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the ozone generator toward the outlet.

12. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the bulb-shaped casing comprises a casing body having one end provided with the fed

portion and the other end made open and a lid having one end provided with the outlet and the other end detachably attached to the other end of the casing body.

13. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the ozone generator comprises a needle-like first electrode having a distal end directed to the outlet and a cylindrical second electrode concentric with the first electrode and disposed concentrically with the outlet, and application of high voltage between the first electrode and the second electrode induces electrical discharge therebetween to generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the first electrode toward the second electrode and outlet.

14. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the ozone generator comprises a needle-like first electrode having a distal end directed to the outlet and a platelike second electrode having a circular opening concentric with the first electrode and disposed concentrically with the outlet, and application of high voltage between the first electrode and the second electrode induces electrical discharge therebetween to generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the first electrode toward the second electrode and outlet.

15. (Amended) The air cleaning device according to claim 13, wherein the first electrode is accommodated in the casing body and the second electrode in the lid.

16. (Amended) The air cleaning device according to claim 14, wherein the first electrode is accommodated in the casing body and the second electrode in the lid.

17. (Amended) The air cleaning device according to claim 11, wherein the DC/AC converter and the boosting transformer are made integral.

18. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the casing is provided at the other end with an illuminator.

19. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the fed portion comprises a base to be attached to and detached from a socket.

20. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the fed portion comprises a base having a pair of pins projecting from a peripheral surface in opposite directions.

21. (Amended) The air cleaning device according to claim 10 or claim 11, wherein the fed portion comprises a plug having a pair of blades or pins to be attached to and detached from an electrical receptacle.

REMARKS

Favorable consideration of the present application, as presently amended, is respectfully requested.


The present preliminary amendment is submitted to amend the claims to delete all reference numerals and to no longer recite the informal language "characterized in that".

The claim changes are not believed to narrow the scope of the claims in any manner.

The present application is believed to be in condition for a full and thorough examination on the merits. An early and favorable consideration of the present application is hereby respectfully requested.

Respectfully submitted,

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Gregory J. Maier
Attorney of Record
Registration No. 25,599
Surinder Sachar
Attorney of Record
Registration No. 34,423



22850

(703) 413-3000
Fax No.: (703)413-2220
GJM/SNS:kst

I:\atty\SNS\217584us-pr.wpd

20101010 0626T001

Marked-Up Copy

Serial No:

Amendment Filed on:

1-4-2002IN THE CLAIMS

--1. (Amended) An air cleaning device comprising a bulb-shaped casing [(1)] provided at one end with an attached portion to be attached to an attaching portion and at the other end with an outlet [(3a)], and a negative ion generator [(21)] accommodated in the casing, [characterized in that] wherein the attached portion is connected to a commercial power source and [that] negative ions are generated by discharge of the negative ion generator and released from the outlet.

2. (Amended) An air cleaning device comprising a bulb-shaped casing [(1)] provided at one end with a fed portion [(4)] to be attached to a feed portion and at the other end with an outlet [(3a)], an AC/DC converter [(11)] accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer [(12)] accommodated in the casing for boosting voltage from the AC/DC converter, and a negative ion generator [(21)] accommodated in the casing to face the outlet and connected to the boosting transformer, [characterized in that] wherein the fed portion is connected to a commercial power source, [that] high voltage is applied from the boosting transformer to the negative ion generator to induce electrical discharge and generate negative ions, and [that] the negative ions are released from the outlet.

3. (Amended) The air cleaning device according to claim 1 or claim 2, [characterized in that] wherein the bulb-shaped casing [(1)] comprises a casing body [(2)]

having one end provided with the fed portion [(4)] and the other end made open and a lid [(3)] having one end provided with the outlet [(3a)] and the other end fixed or detachably attached to the open end of the casing body.

4. (Amended) The air cleaning device according to claim 1 or claim 2, [characterized in that] wherein the negative ion generator [(21)] is constituted of a needle-like electrode [(23)] having a distal end directed to a side of the outlet.

5. (Amended) The air cleaning device according to claim 2, [characterized in that] wherein the DC/AC converter [(11)] and the boosting transformer [(12)] are made integral.

6. (Amended) The air cleaning device according to claim 1 or claim 2, [characterized in that] wherein the bulb-shaped casing [(1)] is provided at the other end with an illuminator [(32)].

7. (Amended) The air cleaning device according to claim 1 or claim 2, [characterized in that] wherein the fed portion [(4)] comprises a base to be attached to and detached from a socket.

8. (Amended) The air cleaning device according to claim 1 or claim 2, [characterized in that] wherein the fed portion [(4)] comprises a base [(4A, 4B)] having a pair of pins projecting from a peripheral surface in opposite directions.

9. (Amended) The air cleaning device according to claim 1 or claim 2, [characterized in that] wherein the fed portion [(4)] comprises a plug having a pair of blades [(4C)] or pins [(4D)] to be attached to and detached from an electrical receptacle.

10. (Amended) An air cleaning device comprising a bulb-shaped casing [(1)] provided at one end with an attached portion to be attached to an attaching portion and at the other end with an outlet [(3a)], accommodating an ozone generator [(21A)], and formed with a portion [(2a, 3c)] for supplying air into the ozone generator, [characterized in that] wherein

the attached portion is connected to a commercial power source, [that] the ozone generator induces electrical discharge to generate negative ions and ozone, and [that] a stream of air containing the negative ions and ozone is released from the ozone generator to the outlet.

11. (Amended) An air cleaning device comprising a bulb-shaped casing [(1)] provided at one end with a fed portion [(4)] to be attached to a feed portion and at the other end with an outlet [(3a)], an AC/DC converter [(11)] accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer [(12)] accommodated in the casing for boosting voltage from the fed portion, an ozone generator [(21A)] accommodated in the using to face the outlet and connected to the boosting transformer, and an air supply portion [(2a, 3c)] formed in the casing for supplying air into the ozone generator, [characterized in that] wherein the fed portion is connected to a commercial power source and [that] high voltage is applied from the boosting transformer to the ozone generator to induce electrical discharge, generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the ozone generator toward the outlet.

12. (Amended) The air cleaning device according to claim 10 or claim 11, [characterized in that] wherein the bulb-shaped casing [(1)] comprises a casing body [(2)] having one end provided with the fed portion [(4)] and the other end made open and a lid [(3)] having one end provided with the outlet [(3a)] and the other end detachably attached to the other end of the casing body.

13. (Amended) The air cleaning device according to claim 10 or claim 11, [characterized in that] wherein the ozone generator [(21A)] comprises a needle-like first electrode [(23)] having a distal end directed to the outlet [(3a)] and a cylindrical second electrode [(24)] concentric with the first electrode [(23)] and disposed concentrically with the

outlet, and [that] application of high voltage between the first electrode and the second electrode induces electrical discharge therebetween to generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the first electrode toward the second electrode and outlet.

14. (Amended) The air cleaning device according to claim 10 or claim 11, [characterized in that] wherein the ozone generator [(21A)] comprises a needle-like first electrode [(23)] having a distal end directed to the outlet [(3a)] and a platelike second electrode [(25)] having a circular opening concentric with the first electrode [(23)] and disposed concentrically with the outlet, and [that] application of high voltage between the first electrode and the second electrode induces electrical discharge therebetween to generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the first electrode toward the second electrode and outlet.

15. (Amended) The air cleaning device according to claim 13, [characterized in that] wherein the first electrode [(23)] is accommodated in the casing body [(1)] and [that] the second electrode [(24)] in the lid [(3)].

16. (Amended) The air cleaning device according to claim 14, [characterized in that] wherein the first electrode [(23)] is accommodated in the casing body [(1)] and [that] the second electrode [(25)] in the lid [(3)].

17. (Amended) The air cleaning device according to claim 11, [characterized in that] wherein the DC/AC converter [(11)] and the boosting transformer [(12)] are made integral.

18. (Amended) The air cleaning device according to claim 10 or claim 11, [characterized in that] wherein the casing [(1)] is provided at the other end with an illuminator [(32)].

19. (Amended) The air cleaning device according to claim 10 or claim 11,
[characterized in that] wherein the fed portion [(4)] comprises a base to be attached to and
detached from a socket.

20. (Amended) The air cleaning device according to claim 10 or claim 11,
[characterized in that] wherein the fed portion [(4)] comprises a base [(4A, 4B)] having a pair
of pins projecting from a peripheral surface in opposite directions.

21. (Amended) The air cleaning device according to claim 10 or claim 11,
[characterized in that] wherein the fed portion [(4)] comprises a plug having a pair of blades
[(4C)] or pins [(4D)] to be attached to and detached from an electrical receptacle.--

DOCKET NO.: 217584US2PCT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

IN RE APPLICATION OF: Koji ANNO

SERIAL NO.: NEW U.S. PCT APPLICATION

FILED: HERewith

INTERNATIONAL APPLICATION NO.: PCT/JP00/04442

INTERNATIONAL FILING DATE: July 4, 2000

FOR: AIR CLEANING DEVICE

REQUEST FOR PRIORITY UNDER 35 U.S.C. 119
AND THE INTERNATIONAL CONVENTION

Assistant Commissioner for Patents
Washington, D.C. 20231


Sir:

In the matter of the above-identified application for patent, notice is hereby given that the applicant claims as priority:

<u>COUNTRY</u>	<u>APPLICATION NO</u>	<u>DAY/MONTH/YEAR</u>
Japan	11-190817	05 July 1999
Japan	2000-030900	08 February 2000

Certified copies of the corresponding Convention application(s) were submitted to the International Bureau in PCT Application No. PCT/JP00/04442. Receipt of the certified copy(s) by the International Bureau in a timely manner under PCT Rule 17.1(a) has been acknowledged as evidenced by the attached PCT/IB/304.

Respectfully submitted,
OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.



Marvin J. Spivak
Attorney of Record
Registration No. 24,913
Surinder Sachar
Registration No. 34,423



22850

(703) 413-3000
Fax No. (703) 413-2220
(OSMMN 1/97)

10049290 01040

Docket No. 217584US2PCT
IN RE APPLICATION OF: Koji ANNO
SERIAL NO: New U.S. PCT Application (Based on PCT/JP00/04442)
FILED: HEREWITH
FOR: AIR CLEANING DEVICE

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Transmitted herewith is an amendment in the above-identified application.

- ☒ No additional fee is required
- ☐ Small entity status of this application under 37 C.F.R. §1.9 and §1.27 is claimed.
- ☒ Additional documents filed herewith: PCT Transmittal Letter/Notice of Priority/PCT/IB/304/Declaration
English Translation of Specification/Information Disclosure Statement
Form PTO-1449/International Search Report/Check for \$1506.00
Amended Sheets (Pages 1, 1a, 2, 2a, 4, 4a, 7, 7a, 9, 9a, 10, 28, 30 and 30a)

The Fee has been calculated as shown below:


CLAIMS	CLAIMS REMAINING		HIGHEST NUMBER PREVIOUSLY PAID	NO. EXTRA CLAIMS	RATE	CALCULATIONS
TOTAL	34	MINUS	34	0	× \$18 =	\$0.00
INDEPENDENT	4	MINUS	4	0	× \$84 =	\$0.00
		<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS			+ \$280 =	\$0.00
		TOTAL OF ABOVE CALCULATIONS				\$0.00
		<input type="checkbox"/> Reduction by 50% for filing by Small Entity				\$0.00
		<input type="checkbox"/> Recordation of Assignment			+ \$40 =	\$0.00
		TOTAL				\$0.00

☐ A check in the amount of **\$0.00** is attached.

☒ Please charge any additional Fees for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

☒ If these papers are not considered timely filed by the Patent and Trademark Office, then a petition is hereby made under 37 C.F.R. §1.136, and any additional fees required under 37 C.F.R. §1.136 for any necessary extension of time may be charged to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.


Marvin J. Spivak
Registration No. 24,913



22850

Customer Number 22850
Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 10/01)

Surinder Sachar
Registration No. 34,423

Docket No. 217584US2PCT
IN RE APPLICATION OF: Koji ANNO
SERIAL NO: New U.S. PCT Application (Based on PCT/JP00/04442)
FILED: HEREWITH
FOR: AIR CLEANING DEVICE

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Transmitted herewith is an amendment in the above-identified application.

- ☒ No additional fee is required
- ☐ Small entity status of this application under 37 C.F.R. §1.9 and §1.27 is claimed.
- ☒ Additional documents filed herewith: PCT Transmittal Letter/Notice of Priority/PCT/IB/304/Declaration
English Translation of Specification/Information Disclosure Statement
Form PTO-1449/International Search Report/Check for \$1506.00
Amended Sheets (Pages 1, 1a, 2, 2a, 4, 4a, 7, 7a, 9, 9a, 10, 28, 30 and 30a)


The Fee has been calculated as shown below:

CLAIMS	CLAIMS REMAINING		HIGHEST NUMBER PREVIOUSLY PAID	NO. EXTRA CLAIMS	RATE	CALCULATIONS	
TOTAL	34	MINUS	34	0	× \$18 =	\$0.00	
INDEPENDENT	4	MINUS	4	0	× \$84 =	\$0.00	
		<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS			+ \$280 =	\$0.00	
		TOTAL OF ABOVE CALCULATIONS					\$0.00
		<input type="checkbox"/> Reduction by 50% for filing by Small Entity					\$0.00
		<input type="checkbox"/> Recordation of Assignment			+ \$40 =	\$0.00	
		TOTAL					\$0.00

☐ A check in the amount of **\$0.00** is attached.

- ☒ Please charge any additional Fees for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.
- ☒ If these papers are not considered timely filed by the Patent and Trademark Office, then a petition is hereby made under 37 C.F.R. §1.136, and any additional fees required under 37 C.F.R. §1.136 for any necessary extension of time may be charged to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

OBLON, SPIVAK, McCLELLAND,
MAIER & NEUSTADT, P.C.


Marvin J. Spivak
Registration No. 24,913



22850

Customer Number 22850
Tel. (703) 413-3000
Fax. (703) 413-2220
(OSMMN 10/01)

Surinder Sachar
Registration No. 34,423

-1-

DESCRIPTION

AIR CLEANING DEVICE

Field of Art:

5 This invention relates to an air cleaning device that generates and diffuses negative ions known to have a "forest bathing effect" and ozone having bactericidal and deodorant actions and that is equipped with lighting.

Background Art:

10 Conventional air cleaning devices are used by inserting a plug attached to a power cord into an electrical receptacle and set in position within a house or automobile.

15 Since the conventional air cleaning devices are of the mount-type as described above, it is impossible to release and diffuse negative ions alone or both negative ions and ozone from above a room or compartment and its mounting location is restricted to some extent.

20 This invention has been accomplished to eliminate the above inconvenience. One object of the invention is to provide an air cleaning device that can be used in any mode by attaching an attached portion (a fed portion) to an attaching portion (a feed portion) without restricting its mounting location.

Disclosure of the Invention:

25 An air cleaning device according to this invention comprises a bulb-shaped casing provided at one end with an attached portion connected to a commercial power source and to be attached to an attaching portion and at the other end with an outlet, and a negative

2044010 0626T001

-1a-

ion generator accommodated within the

10019290 010402

casing, whereby negative ions are generated by electric discharge of the negative ion generator and released from the outlet.

Another aspect of this invention provides an air cleaning device comprising a bulb-shaped casing provided at one end with a fed
5 portion connected to a commercial power source and to be attached to a feed portion and at the other end with an outlet, an AC/DC converter accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer accommodated in the casing for boosting the voltage from the AC/DC
10 converter, and a negative ion generator accommodated in the casing so as to face the outlet and connected to the boosting transformer, whereby negative ions are generated by electric discharge resulting from application of high voltage from the boosting transformer to the negative ion generator and are released from the outlet.

15 The negative ion generator in the above air cleaning device comprises a needle-like electrode having its distal end directed toward the outlet.

Still another aspect of this invention provides an air cleaning device comprising a bulb-shaped casing that accommodates an ozone
20 generator therein, has its one end provided with an attached portion connected to a commercial power source and to be attached to an attaching portion and its opposite end provided with an outlet, and is equipped with an air supply portion for supplying air to the ozone generator, whereby negative ions and ozone are generated by electric
25 discharge of the ozone generator to produce a stream of air containing the negative ions and ozone and flowing from the ozone generator to the outlet.

Yet another aspect of this invention provides an air cleaning device comprising a bulb-shaped casing provided at one end with a fed

10049290 010400

- 2a -

portion connected to a commercial power source and to be attached to
a feed portion and at the other end with an

204070" 0626T001

outlet, an AC/DC converter accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer accommodated in the casing for boosting the voltage from the fed portion, an ozone generator
5 accommodated in the casing so as to face the outlet and connected to the boosting transformer, and an air supply portion for supplying air to the ozone generator in the casing, whereby negative ions and ozone are generated by electric discharge resulting from application of high voltage from the boosting transformer to the ozone generator to produce
10 a stream of air containing the negative ions and ozone and flowing from the ozone generator to the outlet.

The bulb-shaped casing may comprise a casing body having one end provided with the fed portion and an opposite open end, and a lid having one end provided with the outlet and the opposite end firmly
15 or detachably attached to the open end of the casing body.

The ozone generator may comprise a first needle-like electrode connected to the negative pole of the boosting transformer and having a distal end directed to the outlet, and a second electrode in the form of a cylinder concentric with the first electrode or a plate with a
20 circular opening concentric with the first electrode, the first electrode being accommodated in the casing body and the second electrode being positioned concentrically relative to the outlet and accommodated in the lid.

In any of the air cleaning devices, the AC/DC converter and
25 boosting transformer may be made integral; the opposite end of the casing may be provided with lighting; and the feed portion may comprise a base to be attached to or detached from a socket, a base equipped with a pair of pins projecting from the periphery at opposed locations, or a plug equipped with a pair of blades or pins to be inserted

204419 06267001

into or pulled out from an electrical receptacle.

Since the casing of the air cleaning device is formed in the shape of an electric bulb and provided with the fed portion connected to a commercial power source or at one end with the attached portion and at the other end with the outlet, electric power from a socket for an illuminator, a socket built in the ceiling or roof, or an electrical receptacle for a reading lamp can be used as the power source for the air cleaning device. Therefore, the air cleaning device can be disposed on the floor, suspended from above, hung on the wall or set in position at an optional location so that negative ions alone or both negative ions and ozone can be released in an optional direction to obtain a forest bathing effect and clean, sterilize and deodorize the interior of a room or compartment.

Brief Description of the Drawings:

Figure 1 a front view showing a first embodiment of an air cleaning device according to this invention.

Figure 2 is a plan view of the air cleaning device shown in Figure 1.

Figure 3 is a longitudinal cross section of the air cleaning device shown in Figure 1.

Figure 4 is a front view, partially sectioned, showing a second embodiment of the air cleaning device according to this invention.

Figure 5 is a plan view of the air cleaning device shown in Figure 4.

Figure 6 is a longitudinal cross section showing a third embodiment of the air cleaning device according to this invention.

Figure 7 is a cross section taken along line VII-VII in Figure 6.

- 4a -

Figure 8 is a longitudinal cross section showing a fourth

204070" 06257001

embodiment of the air cleaning device according to this invention.

Figure 9 is a front view showing a fifth embodiment of the air cleaning device according to this invention.

5 Figure 10 is a plan view of the air cleaning device shown in Figure 9.

Figure 11 is a longitudinal cross section of the air cleaning device shown in Figure 9.

Figure 12 is a front view showing a sixth embodiment of the air cleaning device according to this invention.

10 Figure 13 is a plan view of the air cleaning device shown in Figure 12.

Figure 14 is a longitudinal cross section of the air cleaning device shown in Figure 12.

15 Figure 15 is a front view showing a seventh embodiment of the air cleaning device according to this invention.

Figure 16 is a plan view of the air cleaning device shown in Figure 15.

Figure 17 is a longitudinal cross section of the air cleaning device shown in Figure 15.

20 Figure 18 is a front view showing an eighth embodiment of the air cleaning device according to this invention.

Figure 19 is a plan view of the air cleaning device shown in Figure 18.

25 Figure 20 is a longitudinal cross section of the air cleaning device shown in Figure 18.

Figure 21(a) is a partial side view of an air cleaning device showing another example of a fed portion.

Figure 21(b) is a bottom view of the air cleaning device shown in Figure 21(a).

20049220 010402

Figure 22(a) is a partial side view of an air cleaning device showing still another example of the fed portion.

Figure 22(b) is a bottom view of the air cleaning device shown in Figure 22(a).

5 Figure 23(a) is a partial side view of an air cleaning device showing yet another example of the fed portion.

Figure 23(b) is a bottom view of the air cleaning device shown in Figure 23(a).

10 Figure 24(a) is a partial side view of an air cleaning device showing a further example of the fed portion.

Figure 24(b) is a bottom view of the air cleaning device shown in Figure 24(a).

15 Figure 25 is an explanatory view illustrating an air cleaning device according to this invention applied to a reading lamp supported on a movable arm having one end fixed to a wall or desk.

Figure 26 is an explanatory view illustrating an air cleaning device according to this invention applied to a mount-type reading lamp.

20 Figure 27 is an explanatory view illustrating an air cleaning device according to this invention applied to an illuminator provided with a plurality of sockets.

Figure 28 is an explanatory view illustrating an air cleaning device according to this invention applied to a socket built in the ceiling.

25 Figure 29(a) is an explanatory view illustrating an air cleaning device according to this invention accommodated in an attachment provided with a socket and a plug.

Figure 29(b) is an explanatory view illustrating the attachment of Figure 29(a) inserted into an electrical receptacle.

Figure 30 is an explanatory view illustrating an air cleaning device according to this invention mounted in a socket attached to a wall.

204070 06267007

Figure 31 is an explanatory view illustrating an air cleaning device according to this invention attached to a stand mounted on a table.

Best Mode for Working the Invention:

5 The present invention will be described in detail below with reference to the accompanying drawings.

Figure 1 is a front view illustrating a first embodiment of an air cleaning device A according to this invention, Figure 2 a plan view illustrating the air cleaning device of Figure 1, and Figure 3 a longitudinal
10 cross section illustrating the air cleaning device of Figure 1, with its part sectioned.

In these figures, denoted by reference numeral 1 is a bulb-shaped casing that comprises a casing body 2 of synthetic resin and a lid 3 of synthetic resin having at its distal end a spherical surface of large
15 curvature approximating to a flat plane.

One end of the casing body 2 of the casing 1 is open and the other end thereof is provided with a base (a feed portion) 4 attached to a socket (a feed portion), not shown, to form connection with a commercial power
source.

20 The distal end surface of the lid 3 corresponding to the distal end of the casing 1 is provided with plural, e.g. four, cylindrical outlets 3a of the same diameter that are arranged along a circle concentric with the distal end surface.

25 The lid 3 has a structure detachably attached by fitting or by other such means to the open end of the casing body 2 and is provided with cross pieces 3b for preventing the fingers etc. from being inserted into the outlets 3a to serve as safety means.

The base 4, like the base of an ordinary electric bulb connected to

204010 0625001

- 7a -

the commercial power source, has at its

204070 0626T001

one end center one electrode 4a and at its periphery the other electrode 4b.

5 The inside of the casing body 2 is divided into a front side chamber 2f and a back side chamber 2r accommodating an AC/DC converter 11 and a boosting transformer 12 by a partition wall 13 that serves also as a mounting member. The partition wall 13 is provided with a round cylindrical support 13a positioned at the center of the four outlets 3a of the lid 3 and projecting toward the front side chamber 2f. The partition wall 13 is desirably made of an insulating material. The AC/DC
10 converter 11 accommodated in the back side chamber 2r converts an alternating current from the base 4 into a direct current that is output into the boosting transformer 12 which is accommodated in the back side chamber and in which the input direct current is boosted.

15 Within the front side chamber 2f is accommodated a negative ion generator 21 that comprises an insulating support base 22 equipped with a cylindrical portion attached onto the cylindrical support 13a of the partition wall 13 and four needle-like conductive first electrodes 23 arranged along a circle concentric with the support base 22, with their respective distal ends directed toward the centers of the four outlets 3a of
20 the lid 3. The four first electrodes 23 are collectively connected to the negative pole side of the boosting transformer 12.

The distal end surface of the lid 3 is provided at the center with a light emitting diode 29 that displays the operation or non-operation state of the negative ion generator 21.

25 The casing body 2 and lid 3 are configured such that when they are made integral by relative movement and fitting, each first electrode 23 is positioned at the center of the outlet 3a by positioning means, e.g. concave and convex means, provided respectively on the casing body 2 and lid 3.

The operation of the air cleaning device A constructed as described above will be described.

By connecting the base 4 to a commercial power source, converting an AC power source into a DC power source with the AC/DC converter 11 and boosting the DC power source with the boosting transformer 12, silent corona discharge is induced between the distal end of each first electrode and the atmosphere forward of each first electrode to generate negative ions. The negative ions pass through a corresponding outlet 3a from each first electrode 23 side and are released by the Coulomb force of the charged atmosphere forward of each first electrode 23.

Since negative ions are generated from the first electrode 23 side inward of the outlets 3a, they are diffused into a room in which the air cleaning device A is disposed to clean the air in the room.

The light emitting diode 29 turns on a light during the operation of the negative ion generator 21 to indicate the generation of negative ions.

However, when a switch or other such means is used to stop the operation of the negative ion generator 21, the light emitting diode 29 puts out lights to indicate non-generation of negative ions.

The principle of negative ions cleaning the air is that negative ions are attached to positive ions (dust on the order of microns, dead ticks, mold, bacteria, pollen, etc.) thought to be harmful to the human body to convert the positive ions into negative ions heavier than the air, that fall on the floor and are adsorbed onto the floor made positive.

The positive ions converted into negative ions and falling on the floor are removed by a vacuum cleaner.

From the first electrode 23, not less than one-million negative ions per milliliter are released all the time. In order to obtain a larger effect, it is desirable to increase the number of the first electrode 23 to

204070 0625001

- 9a -

release a greater number of negative ions.

10049290 010402

While negative ions are thought to have a "forest bathing effect", they act to relax mind and body, prevent oxidization of cells, activate metabolism, heighten the functions of the lungs and the respiratory organ system, and enhance internal secretion to improve the hematogenic action.

These functions of negative ions are proved by the test data using an AMI (Apparatus for measuring the function of the Meridians and their corresponding Internal organs), according to which the blood flow of patients in the atmosphere of negative ions artificially generated is activated and the flow of their internal animation is made good.

According to the first embodiment, as described above, since the casing 1 is bulb-shaped and provided with the base 4 attachable directly to a commercial power source socket, when it is attached to an illuminator socket or other such socket, it is possible to diffuse negative ions from above in a room etc. to clean the air in the room etc.

In addition, since the bulb-shaped casing 1 is of a suspendible type, it is possible to provide a novel air cleaning device with various applications, as compared with conventional mount-type air cleaning devices disposed on the floor, a desk or other such flat place.

Furthermore, the provision of the cross pieces 3b in the outlets 3a can prevent the fingers from being inserted into the outlets 3a and getting in touch with the first electrode 23. Thus, safety can be ensured.

Moreover, since the casing 1 is divided into the casing body 2 and the lid 3 that are detachably attached, the interior of the lid 2 after being detached from the casing body 2 can be simply cleaned and washed with ease.

The air cleaning device A in the first embodiment has no electrode facing the first electrode 23 to induce electric discharge between the first electrode 23 and the ambient air. This will not dirty the inside of the

casing 1 and less require cleaning and washing of the inside of the casing 1, thus making the device maintenance easy.

Since the inside of the casing 1 is less liable to dirty as described above, the lid 3 and the casing body 2 can be fixed to or made integral with each other.

The provision of the light-emitting diode 29 that can turn on a light and put out lights enables the user to confirm whether or not the air cleaning device A releases negative ions.

Figure 4 is a front view, partially sectioned, showing a second embodiment of the air cleaning device according to this invention, and Figure 5 is a plan view of the air cleaning device shown in Figure 4. In this embodiment, the same reference numerals as in Figures 1 to 3 are given to the identical or corresponding elements, the explanation of which will be omitted from the following description.

While the air cleaning device according to the first embodiment is provided with a plurality of negative ion generators, the air cleaning device in this embodiment is equipped with a single negative ion generator. A semicircular lid 3 has a center recess 3e serving as the outlet. A support base 22 is provided at the center with a first electrode 23 that pierces through the bottom of the recess 3e to constitute a negative ion generator 21 in conjunction with the support base 22. The wall of the lid 3 defining the recess 3e is provided with four ribs 3f disposed at 90-degree intervals so as to surround the first electrode 23, thereby serving as safety means. Furthermore, in this embodiment, an AC/DC converter is integral with a boosting transformer 12A in a built-in manner.

In the same manner as in the first embodiment, application of negative high DC voltage from the boosting transformer 12A to the first electrode 23 induces silent corona discharge to generate negative ions that are released from the center recess 3e of the lid 3.

In this embodiment, since there is a single negative ion generator and further since the AC/DC converter is built in the boosting transformer, the air cleaning device can be made compact.

Figure 6 is a longitudinal cross section showing a third embodiment of the air cleaning device according to this invention, and Figure 7 is a cross section taken along line VII-VII in Figure 6. In this embodiment, the same reference numerals as in Figures 1 to 3 are given to the identical or corresponding elements, the explanation of which will be omitted from the following description.

In Figures 6 and 7, a casing body 2 is provided in the peripheral wall on its open (distal end) side with slitted openings 2a circumferentially disposed at predetermined intervals and communicating with its front side chamber 2f to serve as portions for supplying air into an ozone generator 21A which will be described later.

Within the inside portion of a lid 3 on the open side of the casing body 2 are accommodated four cylindrical second conductive electrodes 24 each concentric with an outlet 3a. One end of each second conductive electrode 24 is fitted in and supported by the outlet 3a, and each distal end of needle-like first electrodes 23 supported on a support base 22 in the front side chamber 2f of the casing body 2 enters the opposite open end of each second electrode 24. The first electrodes 23, second electrodes 24 and support base 22 constitute the aforementioned ozone generator 21A.

The inside portion of the lid 3 on the open side of the casing body 2 is provided with two conductive retainers 27 disposed at predetermined positions at an interval of 180 degrees, for example, so that the conductive retainers 27 come into pressure contact with and support opposed second electrodes 24 and, when the lid 3 is attached to the casing body 2, function as contactors electrically connecting the opposed second electrodes 24 respectively via conductors to the positive poles of an AC/DC converter 11

and a boosting transformer 12. In addition, adjacent second electrodes 24 are electrically connected to each other via a conductive connector 26.

Furthermore, a light emitting diode (not shown) is disposed at an appropriate position to display the operation state of the ozone generator 21A.

The operation of the air cleaning device A in this embodiment will be described.

When a high DC voltage is applied between the first electrodes 23 serving as the negative poles and the second electrodes 24 serving as the positive poles, silent corona discharge is induced between the distal end of each first electrode 23 and a portion of each second electrode 24 nearest to the distal end of each first electrode 23 to generate negative ions and ozone. The Coulomb force of the electrified second electrodes 24 causes a stream of air containing negative ions and ozone to pass from the side of each first electrode 23 through each outlet 3a via each second electrode 24.

Air for successively inducing a stream of air passing from the side of each first electrode 23 through each outlet 3a via each second electrode 24 is supplied via the slitted openings 2a.

A stream of air containing negative ions and ozone passes from the side of each second electrode 24 through each outlet 3a and is released and diffused into a room. Thus, the air in the room in which the air cleaning device A is provided can be cleaned as described above and, at the same time, sterilization and deodorization can be attained by a small amount of ozone (not more than 0.05 ppm).

During the operation, dust is electrified and attached to the cylindrical second electrodes 24 to dirty the cylindrical second electrodes. The dirty second electrodes 24 are cleaned and washed after detaching the lid 3 from the casing body 2 or further detaching the second electrodes from the lid 3 that has been detached from the casing body 2. After this cleaning

and washing, the lid 3 is attached to the casing body 2 or the second electrodes 24 are attached to the lid 3 and then the lid 3 is attached to the casing body 2.

5 The light emitting diode not shown turns on a light during the operation of the ozone generator 21A to indicate the generation of negative ions and ozone.

However, when a switch or other such means is used to stop the operation of the ozone generator 21A, the light emitting diode puts out lights to indicate non-generation of negative ions and ozone.

10 In the air cleaning device of this embodiment in particular, since the first electrodes 23 and the same number of cylindrical second electrodes 24 are disposed face to face respectively and also since needle-like electrodes are used as the first electrodes, negative ions and ozone can be generated efficiently and, at the same time, the cylindrical second
15 electrodes 24 enable a stable velocity of an air stream and can increase the amount of the air stream.

Furthermore, since the lid 3 is detachable from and attachable to the casing body 2, the second electrodes 24 can be simply and easily cleaned and washed after detaching the lid 3 from the casing body 2 or
20 after further detaching the second electrodes 24 from the lid 3.

Figure 8 is a longitudinal cross section showing a fourth embodiment of the air cleaning device according to this invention. In this embodiment, the same reference numerals as in Figures 1 to 7 are given to the identical or corresponding elements, the explanation of which will be
25 omitted from the following description.

In Figure 8, four platelike second electrodes 25 each having a circular opening are accommodated in a lid 3 in such a manner as being fixed or detachably attached to the portion of the lid 3 on the open side of a casing body and being concentric with and facing each first electrode 23.

A positioning projection 22a provided on the center of the distal end of a support base 22 is adapted to engage with a center space 25a surrounded by the four second electrodes 25.

5 Therefore, when the positioning projection 22a has been engaged with the center space, the four first electrodes 23 are positioned at locations corresponding to the centers of the circular openings of the second electrodes.

The four first electrodes 23, four second electrodes 25 and support base 22 constitute an ozone generator 21A.

10 At predetermined positions of the outer peripheral edge of the second electrodes 25 at an interval of 180 degrees, for example, are provided conductive connectors 27A that function to position the second electrodes 25 inside the lid 3 and, when the lid 3 is attached to the casing body 2, function to electrically connect the second electrodes to the positive poles of an AC/DC converter 11 and a boosting transformer 12 via
15 conductors.

A light emitting diode (29) not shown is provided on the casing body 2 or lid 3 at an appropriate position to indicate the operation state of the ozone generator 21A.

20 The difference between the operation of the air cleaning device A in this embodiment and that of the third embodiment device will be described.

When a high DC voltage is applied between the first electrodes 23 serving as the negative poles and the second electrodes 25 serving as the positive poles, silent corona discharge is induced between the distal end of
25 each first electrode 23 and the circular opening edge of each second electrode 25 to generate negative ions and ozone. The Coulomb force of the electrified second electrodes 25 causes a stream of air containing negative ions and ozone to pass from the side of each first electrode 23 through each

201010 062500T

outlet 3a via each second electrode 25 and to be diffused.

During the operation, dust is electrified and attached to the second electrodes 25 to dirty the second electrodes 25. The dirty second electrodes 25 are cleaned and washed after detaching the lid 3 from the casing body 2 or further detaching the second electrodes from the lid 3 that has been detached from the casing body 2. After this cleaning and washing, the lid 3 is attached to the casing body 2 or the second electrodes 24 are attached to the lid 3 and then the lid 3 is attached to the casing body 2.

In the fourth embodiment, therefore, the same effects as in the third embodiment can be obtained.

Figure 9 is a front view showing a fifth embodiment of the air cleaning device according to this invention, Figure 10 is a plan view of the air cleaning device shown in Figure 9, and Figure 11 is a longitudinal cross section of the air cleaning device shown in Figure 9. In this embodiment, the same reference numerals as in Figures 1 to 8 are given to the identical or corresponding elements, the explanation of which will be omitted from the following description.

As shown in these figures, a lid 3 of a bulb-shaped casing 1 is provided at the center an open cylindrical portion 3d equipped therein with a socket 31 that is electrically connected to a base 4 and to and from which an electric bulb 32 is attachable and detachable.

Outside of the cylindrical portion 3d a recess 3e serving as an outlet is formed. The distal end of a first electrode 23 supported on a support base 22 projects from the bottom of the recess. On the inner surface of the recess 3e four ribs 3f are formed so as to surround the first electrode 23, thereby protecting the first electrode.

Inside of a casing body 2 partitioned by the support base 22, there is formed a mounting wall 14 on which a boosting transformer 12A having

an AC/DC converter integrally incorporated therein is supported. The boosting transformer 12A is electrically connected to the first electrode 23.

The operation of the air cleaning device A will be described.

5 When high DC voltage is applied to the first electrode 23, negative ions are generated and released. The same effects as in the first and second embodiments can thus be obtained.

Since the air cleaning device A is equipped with illuminating means, by attaching the device to a socket for an electric bulb, the effects
10 of negative ions can be obtained without necessitating provision of an illuminator.

Figure 12 is a front view showing a sixth embodiment of the air cleaning device according to this invention, Figure 13 is a plan view of the air cleaning device shown in Figure 12, and Figure 14 is a longitudinal
15 cross section of the air cleaning device shown in Figure 12. In this embodiment, the same reference numerals as in Figures 1 to 11 are given to the identical or corresponding elements, the explanation of which will be omitted from the following description.

As shown in these figures, a lid 3 is provided in its distal end
20 surface with three outlets 3a and three openings 3c each formed between the adjacent outlets and on a circle passing through the centers of the outlets 3a, that have a function to supply air into an ozone generator 21A.

A safety measure is taken, if necessary, by providing the openings
25 3 with cross pieces similar to those 3b of the outlets 3a.

The lid is further provided at the center of its distal end surface with a cylindrical portion 3d extending into the open end side of a casing body 2, the outer periphery of which positions a second electrode 25 and the inside of which is formed with a socket 31 to and from which an electric

bulb is attachable and detachable.

5 The casing body 2 is formed therein on its open end side with a partitioning support base 22A on which first electrodes 23 having their respective distal ends directed to the centers of the outlets 3a are arranged along a circle concentric with the open end of the casing body. The center of the support base is formed with a positioning hole 22b in which the cylindrical portion 3d of the lid 3 is fitted.

10 At the lower inside of the casing body 2 partitioned by the support base 22A, there is formed a mounting wall 14 on which a boosting transformer 12A having an AC/DC converter integrally incorporated therein is supported.

15 The platelike second electrode 25 having three circular holes is formed at its center with a positioning hole 25B in which the cylindrical portion 3d of the lid 3 is fitted and further with three circular holes 25C that are disposed between the adjacent holes and along a circle connecting the centers of the holes and face the three openings 3c. The air entering the lid 3 from the openings 3c is supplied from the holes 25C into the ozone generator 21A constituted of the first electrodes 23, second electrode 25 and partitioning support base 22A.

20 When the lid 3 has been attached to the casing body 2, the first electrodes 23, holes of the second electrode 25 and outlets 3a are disposed concentrically. The openings 3c and holes 25C are also disposed concentrically.

25 The second electrode 25 is connected to the positive pole of the boosting transformer 12A though this connection is not shown.

The difference between the operation of the air cleaning device A in this embodiment and that of the preceding embodiment devices will be described. When high DC voltage is applied between the first electrodes 23 and the second electrode 25 to generate negative ions and ozone, a stream

of air containing the negative ions and ozone passes through the holes of the second electrode 25 and outlets 3a and is released.

Air for successively generating an air stream that passes from the side of the first electrodes 23 through the holes of the second electrode 25 and outlets 3a is supplied via the openings 3c and holes 25C.

The inside of a room can be illuminated as occasion demands by the electric bulb 32.

In the sixth embodiment, the same effects as in the third and fourth embodiments can be obtained. Since the air cleaning device in this embodiment is equipped with illuminating means, by attaching the device to a socket for an electric bulb, the effects of negative ions can be obtained without necessitating provision of an illuminator. Air cleaning can thus be attained.

Figure 15 is a front view showing a seventh embodiment of the air cleaning device according to this invention, Figure 16 is a plan view of the air cleaning device shown in Figure 15, and Figure 17 is a longitudinal cross section of the air cleaning device shown in Figure 15. In this embodiment, the same reference numerals as in Figures 1 to 14 are given to the identical or corresponding elements, the explanation of which will be omitted from the following description.

In these figures, a lid 3 is made from transparent or translucent resin and provided in its distal end portion with three recesses 3e that are disposed on a circle and serve as outlets. When the lid has been attached to a casing body 2, three first electrodes 23 formed on a partitioning support base 22A have their respective distal ends projecting from the bottoms of the recesses 3e. Inside of each recess 3e, there are four ribs 3f disposed at intervals of 90 degrees to surround the first electrode 23 and function as safety means.

Above the partitioning support base 22A is provided a reflector 33

that is attached to a socket 31 for effectively reflecting light from an electric bulb 32.

While the operation of the air cleaning device A in this embodiment is substantially the same as that of the preceding
5 embodiment, since the electric bulb 32 is covered by the lid 3, it is possible to eliminate direct contact with the electric bulb 32 and obtain soft indirect illuminating light through the lid 3.

Figure 18 is a front view showing an eighth embodiment of the air
10 cleaning device according to this invention, Figure 19 is a plan view of the air cleaning device shown in Figure 18, and Figure 20 is a longitudinal cross section of the air cleaning device shown in Figure 18. In this embodiment, the same reference numerals as in Figures 1 to 17 are given to the identical or corresponding elements, the explanation of which will be omitted from the following description.

15 In these figures, a lid 3 has slitted openings 3g formed circumferentially in its peripheral surface at regular intervals for supplying air into an ozone generator 21A.

A conductive internally threaded cylinder 7 is fitted in a
20 cylindrical support portion 22a of a support base 22 disposed at the center of the open end of a casing body 2. The lid 3 is detachably attached to the casing body 2 by a fitting screw 8 having an insulating head and a shaft piercing through the lid 3 and helically engaging with the internally threaded cylinder 7.

25 A light guide plate 30 is provided between the casing body 2 and the lid 3 for guiding light from a light emitting diode 29 provided in the casing body 2 to the distal end side of the lid for emission.

A platelike second electrode 25 having circular holes is attached by the fitting screw to the lid 3 so that it is disposed concentrically with a circle connecting outlets 3a and a circle connecting first electrodes 23, and

204070" 0626T001

is electrically connected to a boosting transformer 12A integrally incorporating a AC/DC converter therein via the internally threaded cylinder 7, fitting screw attached to the internally threaded cylinder 7, etc.

5 While the operation of the air cleaning device A in this embodiment is substantially the same as that of the preceding embodiment, the device operation state in this embodiment can be confirmed from light guided by the light guide plate 30.

10 The fed portion of the air cleaning device according to the present invention will be described.

204019290 010402
15 While the base 4 for an ordinary electric bulb is used as the fed portion in the embodiments described so far, it can be changed to a base 4A of a so-called D-type as shown in Figures 21(a) and 21(b) in which a pair of slender pins project from the opposed positions of the periphery or a so-called S-type as shown in Figures 22(a) and 22(b) in which a pair of bold short pins project from the opposed positions of the periphery, depending on a corresponding electrical receptacle.

20 Further, depending on a corresponding electrical receptacle, a plug having a pair of parallel blades 4C projecting from its one end as shown in Figures 23(a) and 23(b) or a plug having a pair of parallel pins 4D projecting from its one end as shown in Figures 24(a) and 24(b) can also be used as the fed portion.

 Examples of attachment of the air cleaning device according to the present invention will be described.

25 Figure 25 shows an example in which the air cleaning device A of this invention equipped with an illuminator 32 is attached to the socket of a reading lamp 41A supported on one end of a movable arm having the opposite end fixed to a desk or wall. Figure 26 shows an example in which the air cleaning device A of this invention equipped with an illuminator 32

is attached to the socket of a mount-type reading lamp 41B. In these examples, the reading lamps can be used in the same manner as usual and, when a power switch is turned on, a flow of air containing negative ions or both negative ions and ozone is released from backward to forward of the lampshade, thereby relaxing mind and body and cleaning air.

Figure 27 shows an example in which the air cleaning devices A of this invention are attached to vacant sockets of an illuminating implement 51 equipped with a plurality of sockets. When a remote controller 52 is used to turn the power switch on, a stream of air containing negative ions and ozone is released downward of the lampshade.

In this example, the air cleaning devices A have a signal receiving portion that receives a control signal from the remote controller 52 and a control portion that, based on the received signal, turns an illuminator 32 on and off, turns the air cleaning devices A on and off, controls the amount of negative ions and ozone generated, and enables intermittent or timer-based generation.

Figure 28 shows an example in which the air cleaning device A of this invention is attached to a socket 62 built in the ceiling 61. When a power switch is turned on, an illuminator 32 is lighted and, at the same time, a stream of air containing negative ions and ozone that is slightly heavier than air flows downward out of the ceiling 61 and is diffused.

The air cleaning device A of this invention can be accommodated in an attachment 71 provided with a socket 72 and a plug 73, as shown in Figure 29(a), and can be used by inserting the plug 72 into an electrical receptacle 75 formed in a wall 74 as shown in Figure 29(b). By turning a switch on, a stream of air containing negative ions and ozone is released upward. Using the attachment in this manner with the plug inserted into the electrical receptacle formed in the wall enables the air cleaning device to be operated with ease even in the absence of a socket

conforming to its base.

Figure 30 shows an example in which the air cleaning device A of this invention is mounted in a socket 81 attached to a wall 74. When a switch is turned on, a stream of air containing negative ions and ozone is released laterally.

Figure 31 shows an example in which the air cleaning device A of this invention is attached to a stand 91 mounted on a table equipped with an electrical receptacle and a power cord (neither shown). By turning a switch 92 on, a stream of air containing negative ions and ozone is released upward.

While the casing has been made from a synthetic resin material in any of the foregoing embodiments, it can be made from any other material, provided that if it is made from a material having conductivity, it is necessary to ensure insulation between itself and the conductive portions including the first electrode, second electrode, retainer, connectors, etc.

Though the shape of the casing in its plan view has been described as being circular, it may be any other shape, e.g., an oval shape or polygonal shape including a triangle, a tetragon, a pentagon, a hexagon, etc. Furthermore, while the foregoing description has shown a small-sized electric bulb as the contour of the casing, the contour may be that of a large-sized electric bulb or ball.

The lid has had the circular outlets. The outlets may be of any other shape. In addition, they are not necessarily be concentric accurately with the first electrode and the holes of the second electrode, but may be overlapped with the first electrode or with both the first electrode and the holes of the second electrode. Furthermore, it is selected whether the air cleaning device should have an illuminator, depending on its mounting locations.

When the air cleaning device is equipped with an illuminator, it is preferable that the illuminator is interlocked with the negative ion generator or ozone generator so that the illuminator can work during the operation of the negative ion generator or ozone generator and cannot do
5 during the non-operation of the generator. As a result, the illuminator can also serve as display means showing the operation state of the generator.

In all the embodiments, the air cleaning device has been provided at its one end with a fed portion. However, the fed portion can be replaced
10 with an attached portion having a similar configuration and, in addition, if the negative ion generator or ozone generator, power source, boosting transformer, etc. are incorporated in the air cleaning device, negative ions or both negative ions and ozone can be generated even where electricity is not fed.

20 The number of the first electrode used is four in the first, third and fourth embodiments, one in the second and fifth embodiments, and three in the sixth, seventh and eighth embodiments. Thus, at least one first electrode will suffice.

While the outlet or recess has been configured to have the cross
20 pieces capable of preventing finger touch with the first electrode, such safety means can instead comprise a plurality of projections extending from the peripheral wall that defines the outlet or recess, or a combination of a concentric rib and support ribs projecting radially from the peripheral wall that defines the outlet or recess for supporting the concentric rib.

25 The AC/DC converter and the boosting transformer has been configured separately or integrally. Either configuration will do.

The portion for supplying air into the ozone generator has been formed on either the casing body or the lid. However, it may be formed on each of the two.

In the first embodiment, the casing body and the lid of the casing have been detachably attached to each other. However, since there is no electrode facing the first electrode, resulting in few possibility of dirtying the inside of the casing, as described earlier, the two may be made integral.

5 The second electrode has been detachably attached to the lid using the retainer in the third embodiment and using the connector in the fourth embodiment. However, it may be detachably attached to the lid using a screw and connected to the positive pole of the AC/DC converter or boosting transformer accommodated in the casing body using a
10 connector.

Furthermore, while the second electrode has been described as being accommodated in the lid, it may be accommodated in the casing body.

20 The electric bulb has been shown as the illuminator. However, the illuminator can include a halogen lamp, a fluorescent lamp, a surface light-emitting element and a high-brightness light-emitting diode. A halogen lamp has the effect of securing a light projecting distance. A fluorescent lamp has the effect of securing high brightness while not accumulating heat. A surface light-emitting element has the effect of only
25 requiring a small amount of power consumption, accumulating little heat and attaining a compact size due to its flat surface and no irregularities. A high-brightness light-emitting diode has the effect of only requiring a small amount of power consumption, accumulating little heat, ensuring its long service life and attaining a compact size.

 In the mounting examples, the air cleaning devices equipped therein with the ozone generator have been cited. The mounting examples can be applied to the air cleaning devices equipped therein with the negative ion generator.

When the air cleaning device is attached to an untouchable

204070 0825T001

position, e.g., the ceiling, the control portion having various control functions, e.g., a microcomputer, is disposed in the casing and a remote controller is used to interlock the negative ion generator or ozone generator and the illuminator or cause them to be operated separately, control the amount of negative ions and ozone generated with an increase or decrease in the number of electrodes to which voltage is applied, and enable intermittent or timer-based generation. Otherwise, a controller attached to a wall is used to enable the same operation and control.

Even when the air cleaning device is attached to a touchable location, the aforementioned remote controller or controller attached to the wall can be used to enable the same operation and control.

Furthermore, while the foregoing description relates to generation of either negative ions alone or both negative ions and ozone, ozone alone may be generated.

Industrial Applicability:

As has been described in the foregoing, in the air cleaning device according to the present invention, since a casing is bulb-shaped and is equipped with an attached or fed portion that is to be attached to an attaching or feed portion, attachment of the attached or fed portion to a socket for illumination enables negative ions and ozone to be released from above in a room or other such space, thereby making it possible to clean the air in the room or other such space and effect bactericidal and deodorant actions. In the case of the suspendible type of bulb-shaped casing, it is possible to provide a novel air cleaning device with various applications, as compared with conventional mount-type air cleaning devices disposed on the floor, a desk or other such flat place.

Furthermore, the negative ion generator can be constituted of first electrodes. In this case, therefore, there is few possibility of dirtying

the inside of the casing, thus less requiring cleaning and washing operations of the inside of the casing and making the device maintenance easy.

5 In addition, since the casing is divided into the casing body and the lid which are attachable to and detachable from each other, after detaching the lid from the casing body it is possible to easily clean and wash the inside of the lid and the second electrode exposed to dust and dirtied.

10 Moreover, since the second electrode is formed into a cylindrical one or a platelike one with circular holes and the first electrodes are formed into needle-like ones, it is possible to efficiently generate negative ions and ozone, stabilize the velocity of an air stream and increase the amount of the air stream. In the case of the air cleaning device with an embedded illuminator, it is possible to acquire the effects of negative ions and ozone
15 even when the device is provided where illumination is required.

204070 06267001

Claims:

1. An air cleaning device comprising a bulb-shaped casing (1) provided at one end with an attached portion to be attached to an attaching portion and at the other end with an outlet (3a), and a negative ion generator (21) accommodated in the casing, characterized in that the attached portion is connected to a commercial power source and that negative ions are generated by discharge of the negative ion generator and released from the outlet.

2. An air cleaning device comprising a bulb-shaped casing (1) provided at one end with a fed portion (4) to be attached to a feed portion and at the other end with an outlet (3a), an AC/DC converter (11) accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer (12) accommodated in the casing for boosting voltage from the AC/DC converter, and a negative ion generator (21) accommodated in the casing to face the outlet and connected to the boosting transformer, characterized in that the fed portion is connected to a commercial power source, that high voltage is applied from the boosting transformer to the negative ion generator to induce electrical discharge and generate negative ions and that the negative ions are released from the outlet.

3. The air cleaning device according to claim 1 or claim 2, characterized in that the bulb-shaped casing (1) comprises a casing body (2) having one end provided with the fed portion (4) and the other end made open and a lid (3) having one end provided with the outlet (3a) and the other end fixed or detachably attached to the open end of the casing body.

4. The air cleaning device according to claim 1 or claim 2, characterized in that the negative ion generator (21) is constituted of a needle-like electrode (23) having a distal end directed to a side of the

outlet.

5. The air cleaning device according to claim 2, characterized in that the DC/AC converter (11) and the boosting transformer (12) are made integral.

6. The air cleaning device according to claim 1 or claim 2, characterized in that the bulb-shaped casing (1) is provided at the other end with an illuminator (32).

7. The air cleaning device according to claim 1 or claim 2, characterized in that the fed portion (4) comprises a base to be attached to and detached from a socket.

8. The air cleaning device according to claim 1 or claim 2, characterized in that the fed portion (4) comprises a base (4A, 4B) having a pair of pins projecting from a peripheral surface in opposite directions.

9. The air cleaning device according to claim 1 or claim 2, characterized in that the fed portion (4) comprises a plug having a pair of blades (4C) or pins (4D) to be attached to and detached from an electrical receptacle.

10. An air cleaning device comprising a bulb-shaped casing (1) provided at one end with an attached portion to be attached to an attaching portion and at the other end with an outlet (3a), accommodating an ozone generator (21A), and formed with a portion (2a, 3c) for supplying air into the ozone generator, characterized in that the attached portion is connected to a commercial power source, that the ozone generator induces electrical discharge to generate negative ions and ozone and that a stream of air containing the negative ions and ozone is released from the ozone generator to the outlet.

11. An air cleaning device comprising a bulb-shaped casing (1) provided at one end with a fed portion (4) to be attached to a feed portion and at the other end with an outlet (3a), an AC/DC converter (11)

204070" 06267001

accommodated in the casing for converting an alternating current from the fed portion into a direct current, a boosting transformer (12) accommodated in the casing for boosting voltage from the fed portion, an ozone generator (21A) accommodated in the casing to face the outlet and connected to the boosting transformer, and an air supply portion (2a, 3c) formed in the casing for supplying air into the ozone generator, characterized in that the fed portion is connected to a commercial power source and that high voltage is applied from the boosting transformer to the ozone generator to induce electrical discharge, generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the ozone generator toward the outlet.

12. The air cleaning device according to claim 10 or claim 11, characterized in that the bulb-shaped casing (1) comprises a casing body (2) having one end provided with the fed portion (4) and the other end made open and a lid (3) having one end provided with the outlet (3a) and the other end detachably attached to the other end of the casing body.

13. The air cleaning device according to claim 10 or claim 11, characterized in that the ozone generator (21A) comprises a needle-like first electrode (23) having a distal end directed to the outlet (3a) and a cylindrical second electrode (24) concentric with the first electrode (23) and disposed concentrically with the outlet, and that application of high voltage between the first electrode and the second electrode induces electrical discharge therebetween to generate negative ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the first electrode toward the second electrode and outlet.

14. The air cleaning device according to claim 10 or claim 11, characterized in that the ozone generator (21A) comprises a needle-like first electrode (23) having a distal end directed to the outlet (3a) and a platelike second electrode (25) having a circular opening concentric with

204070 06257001

- 30a -

the first electrode (23) and disposed concentrically with the outlet, and that application of high voltage between the first electrode and the second electrode induces electrical discharge therebetween to generate negative

204070 0625T001

ions and ozone and produce a stream of air containing the negative ions and ozone that flows from the first electrode toward the second electrode and outlet.

15. The air cleaning device according to claim 13, characterized in that the first electrode (23) is accommodated in the casing body (1) and that the second electrode (24) in the lid (3).

16. The air cleaning device according to claim 14, characterized in that the first electrode (23) is accommodated in the casing body (1) and that the second electrode (25) in the lid (3).

17. The air cleaning device according to claim 11, characterized in that the DC/AC converter (11) and the boosting transformer (12) are made integral.

18. The air cleaning device according to claim 10 or claim 11, characterized in that the casing (1) is provided at the other end with an illuminator (32).

19. The air cleaning device according to claim 10 or claim 11, characterized in that the fed portion (4) comprises a base to be attached to and detached from a socket.

20. The air cleaning device according to claim 10 or claim 11, characterized in that the fed portion (4) comprises a base (4A, 4B) having a pair of pins projecting from a peripheral surface in opposite directions.

21. The air cleaning device according to claim 10 or claim 11, characterized in that the fed portion (4) comprises a plug having a pair of blades (4C) or pins (4D) to be attached to and detached from an electrical receptacle.

FIG. 1

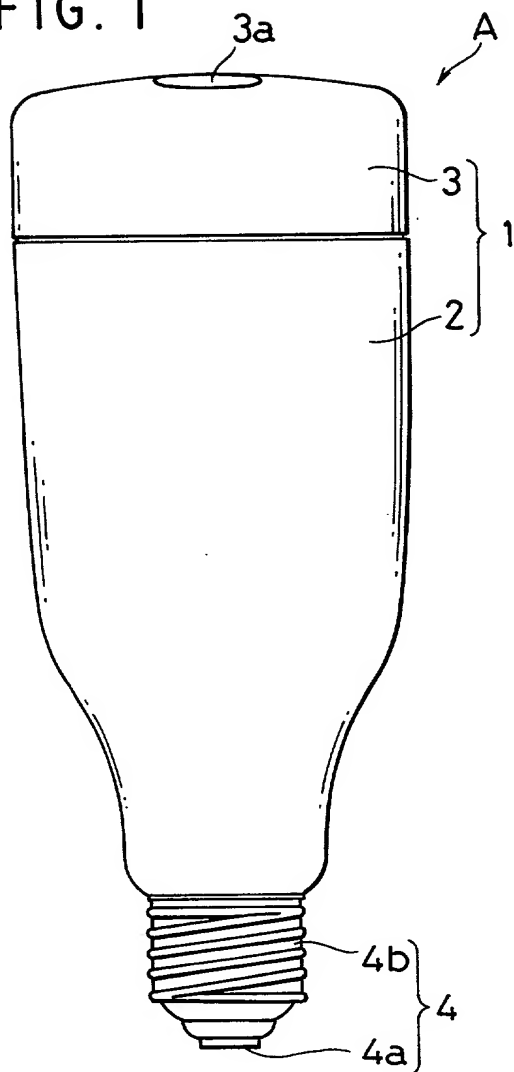


FIG. 2


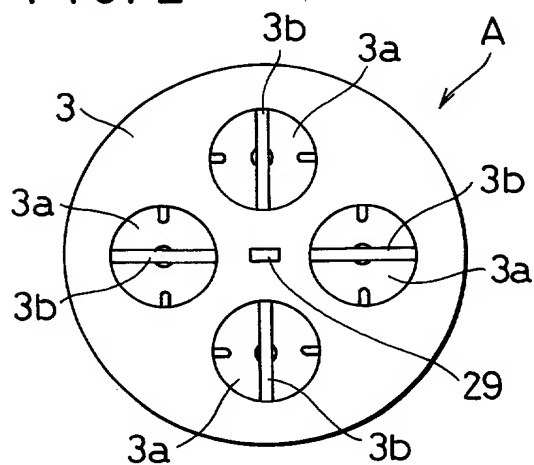


FIG. 3

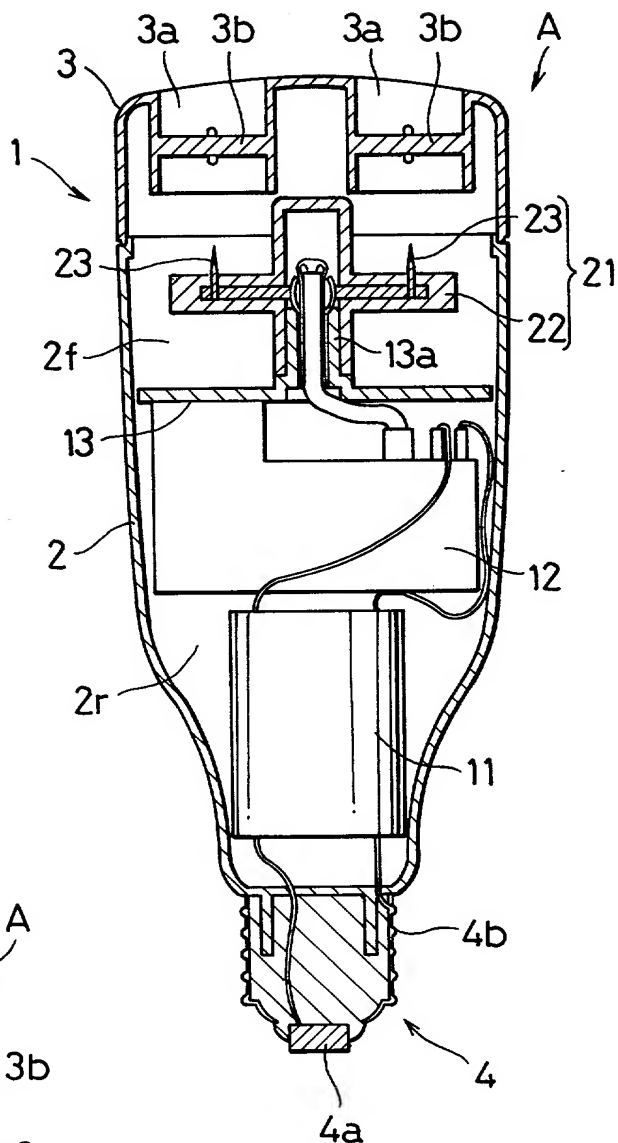

2/14

FIG. 4

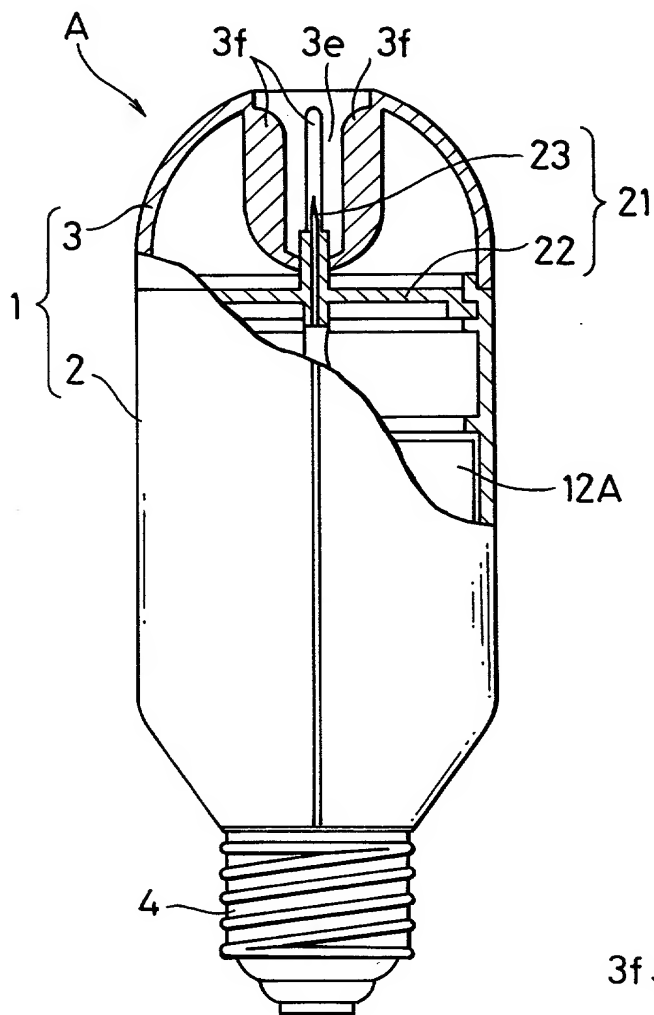


FIG. 5

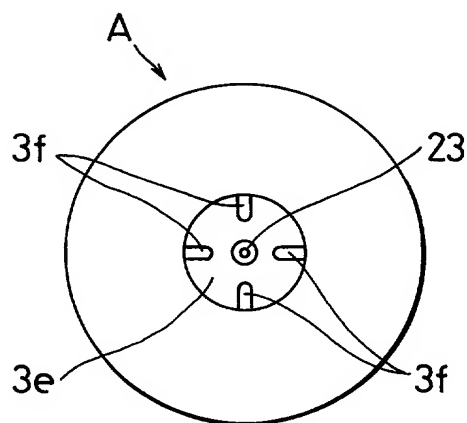


FIG. 6


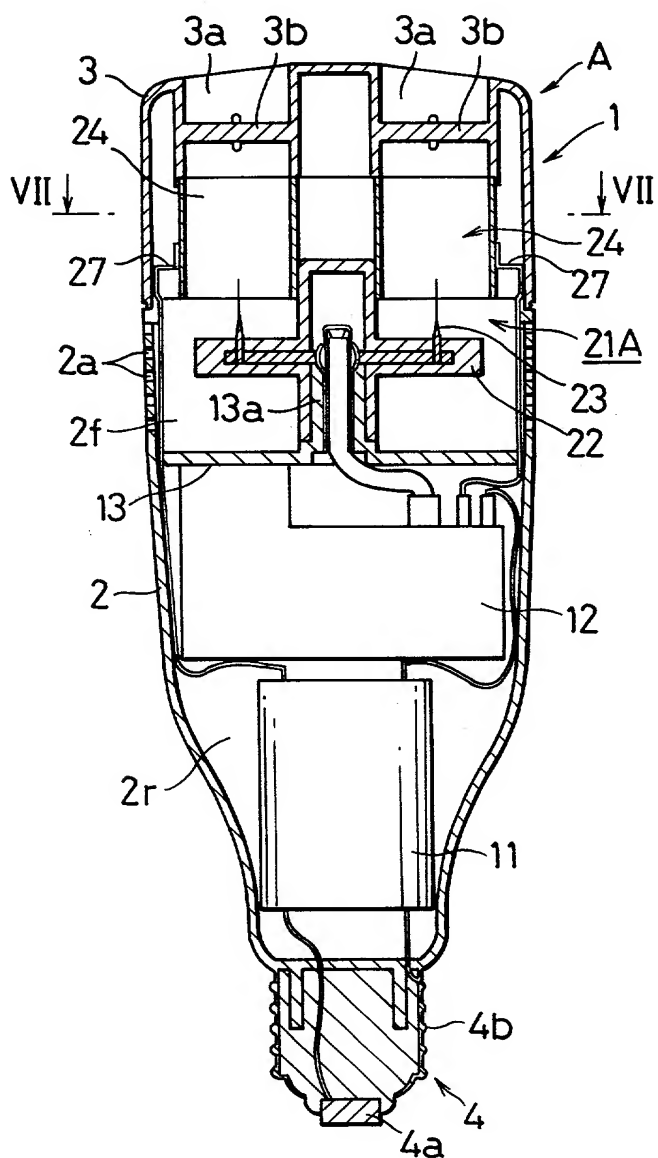



FIG. 7

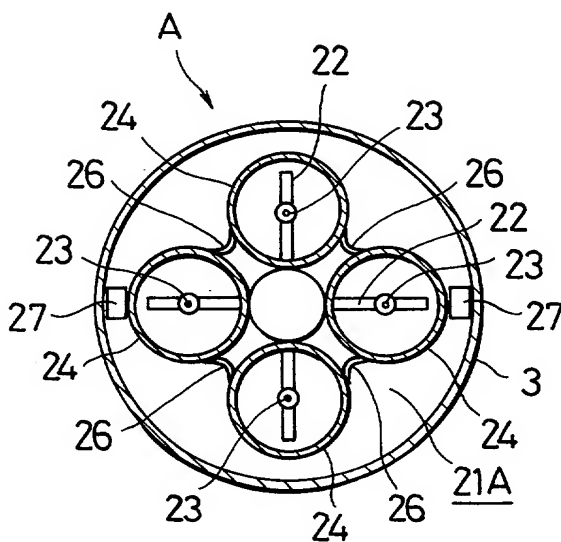

204070" 0626T00T

4/14

FIG. 8

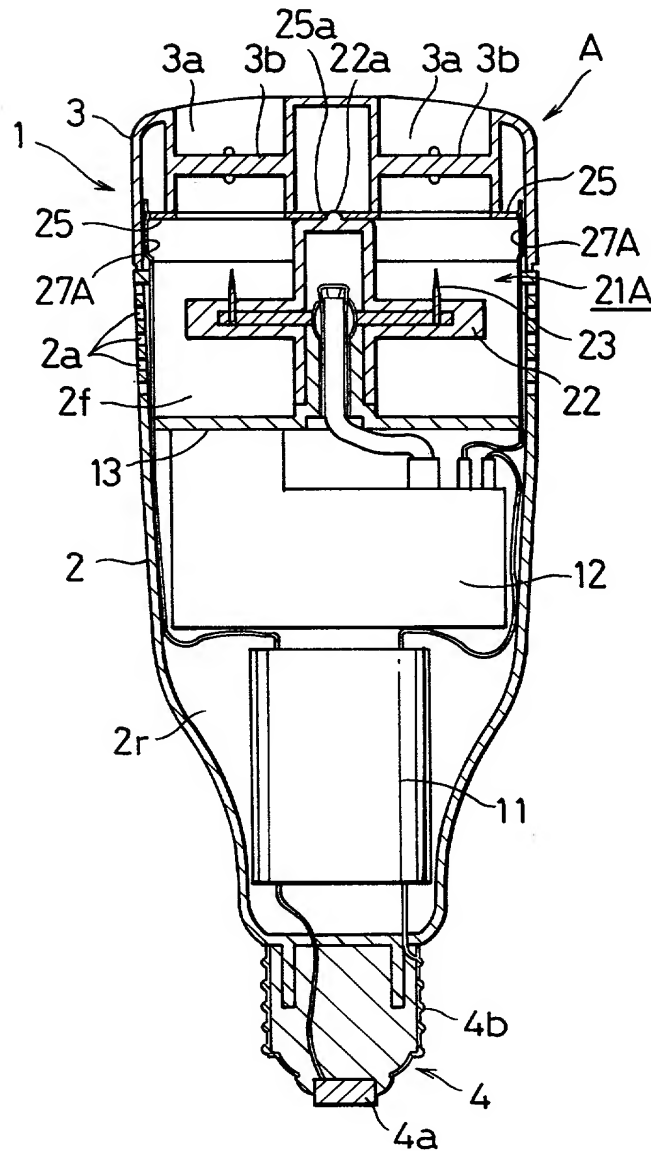

5/14

FIG. 9

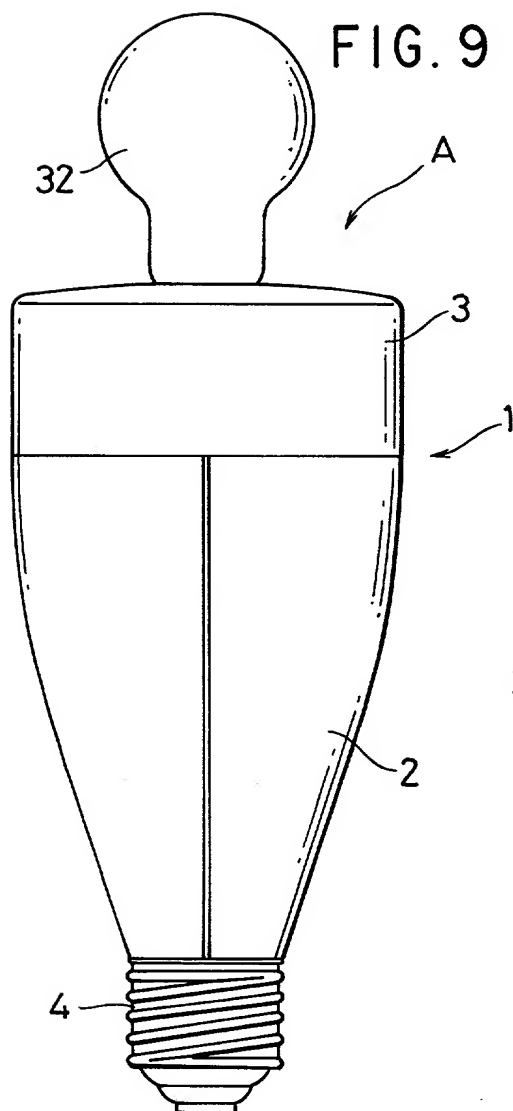


FIG. 11

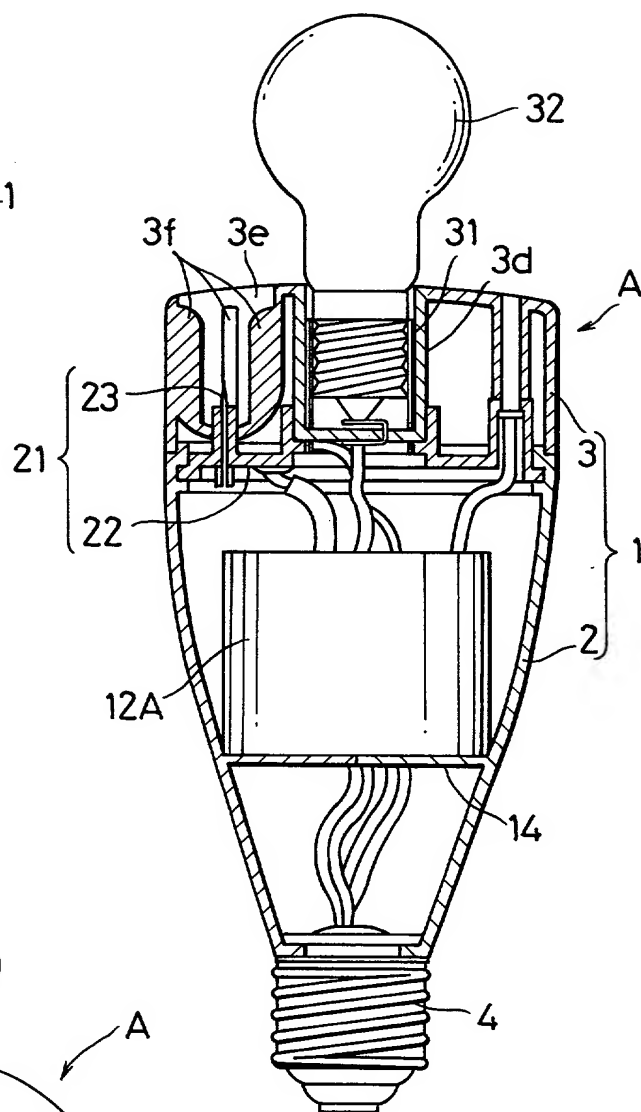


FIG. 10

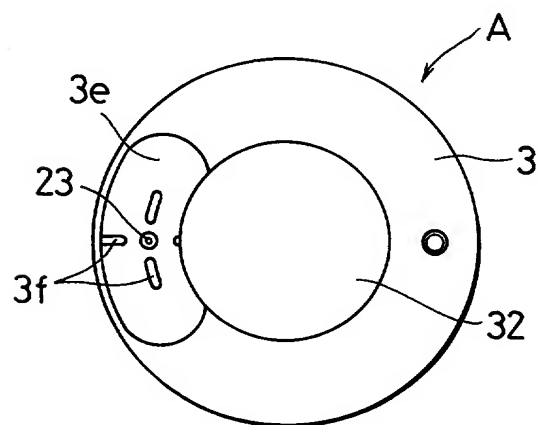


FIG. 12^{6/14}

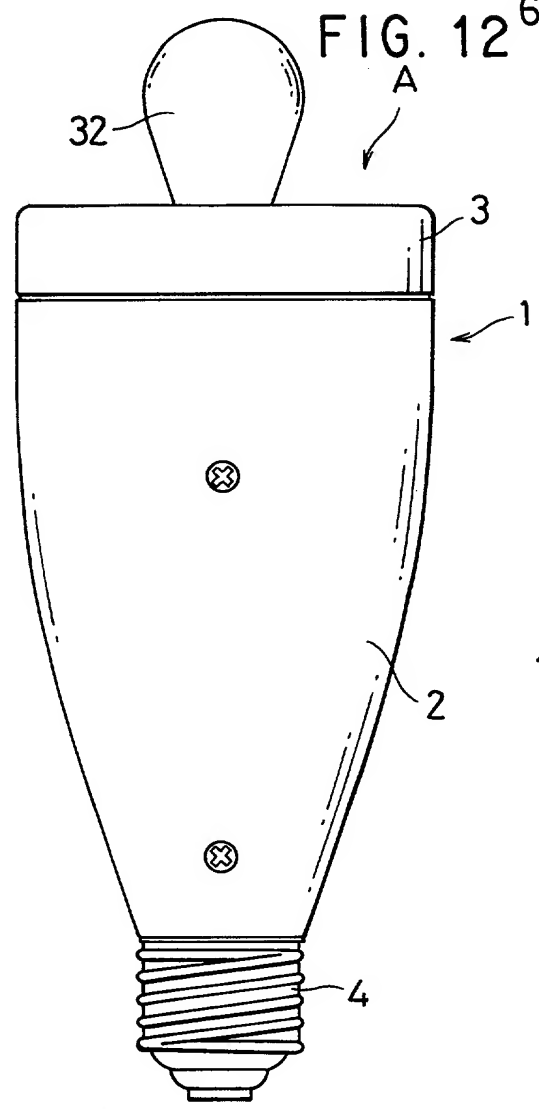


FIG. 14

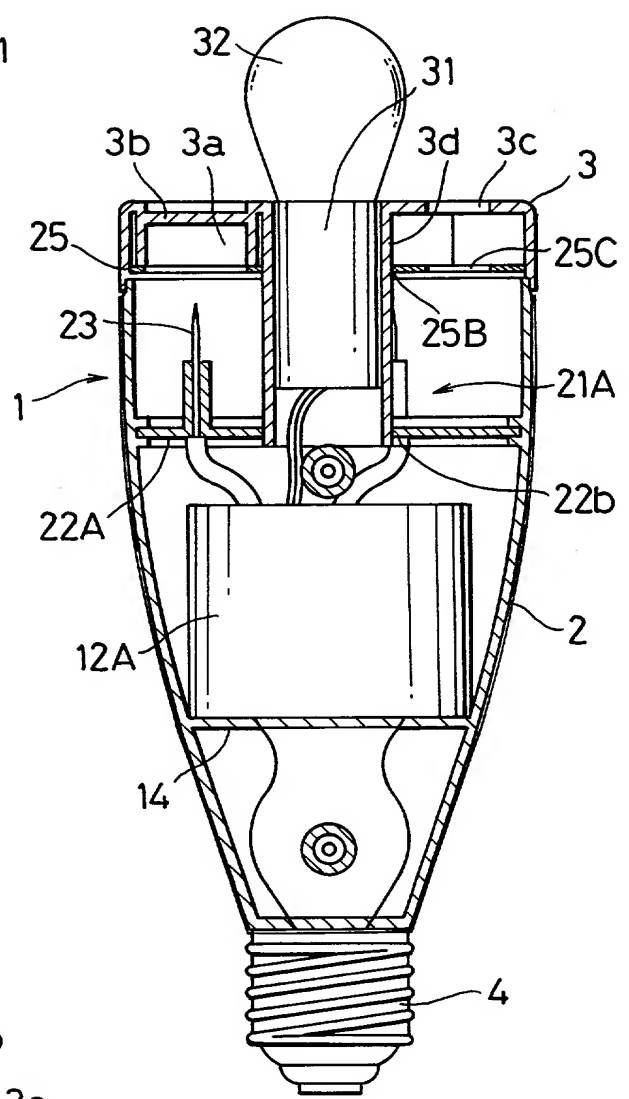


FIG. 13

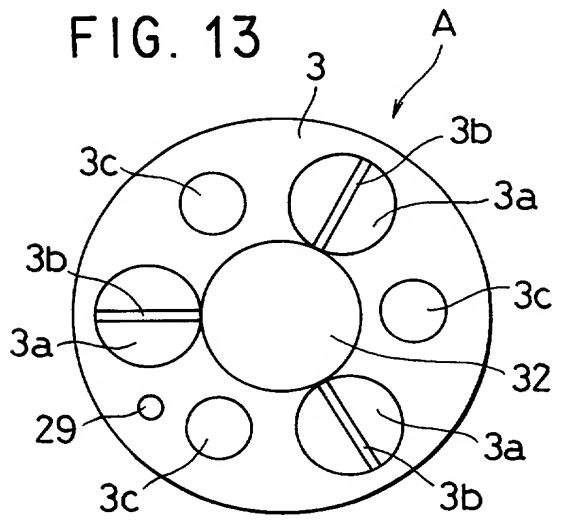


FIG. 15

7/14

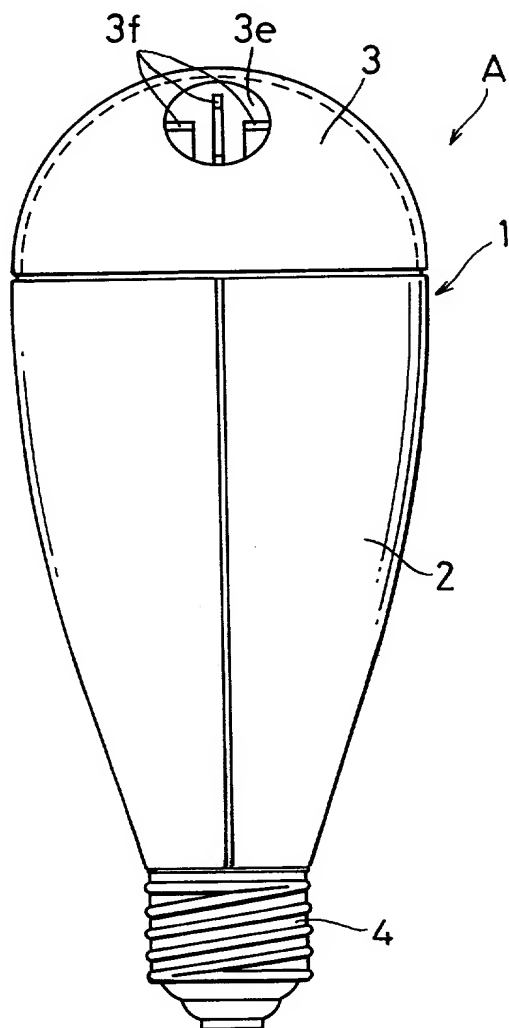


FIG. 17


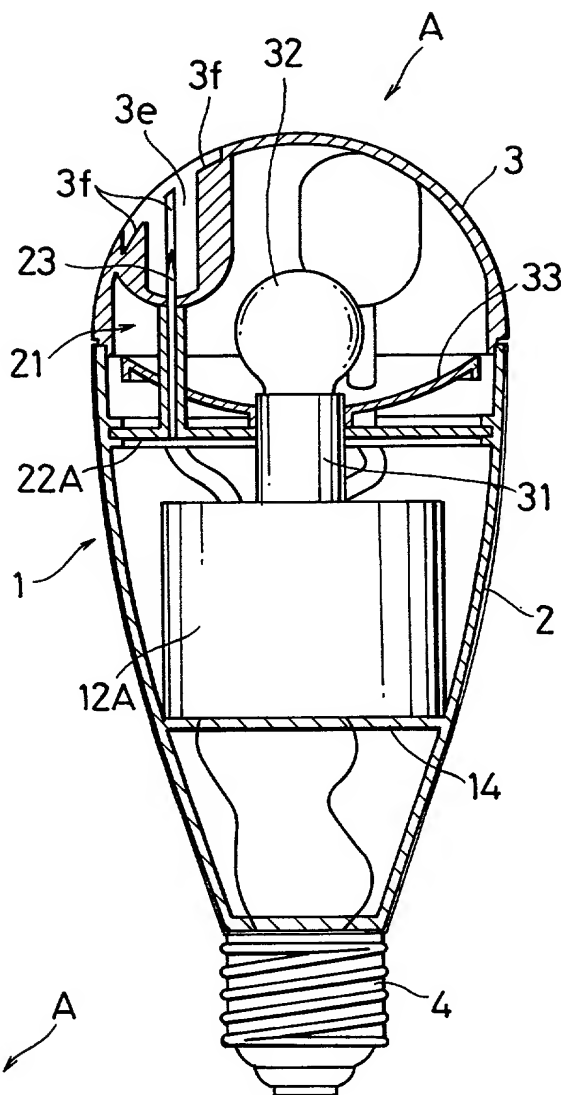


FIG. 16

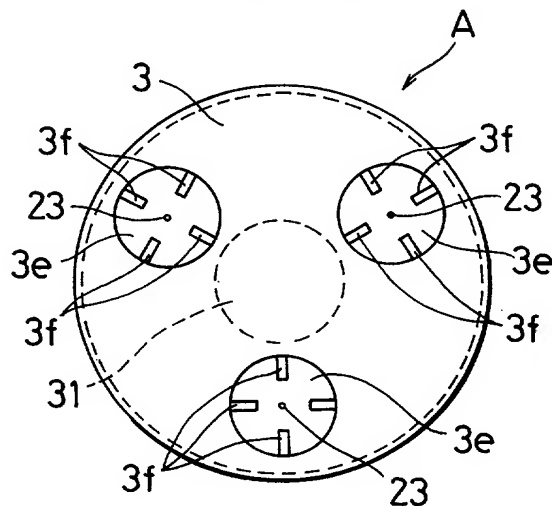

10039290 0626T001

8/14

FIG. 18

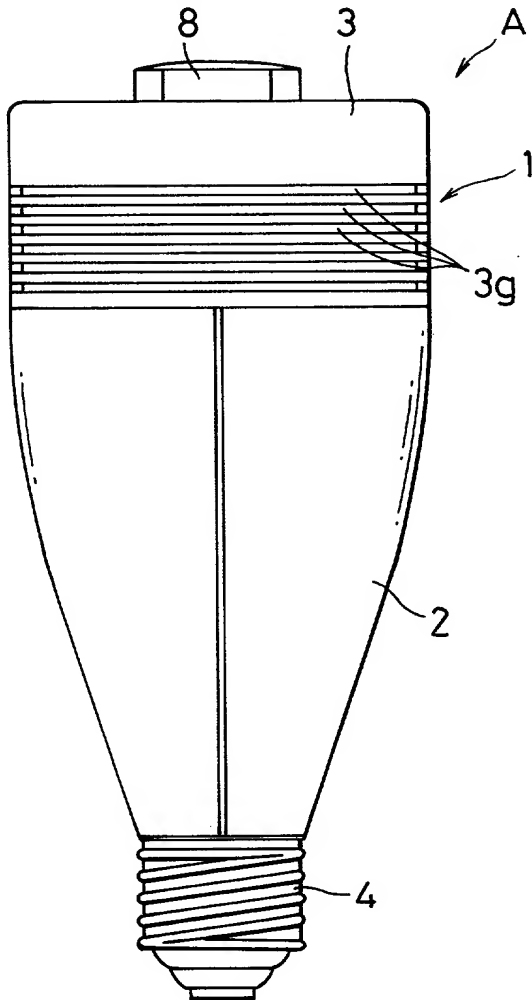


FIG. 20


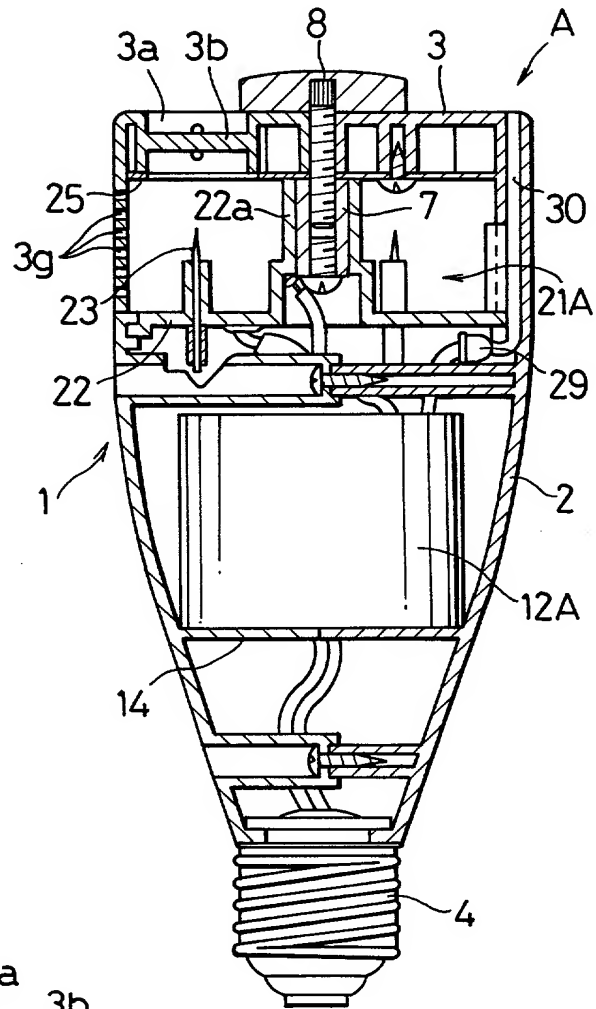


FIG. 19

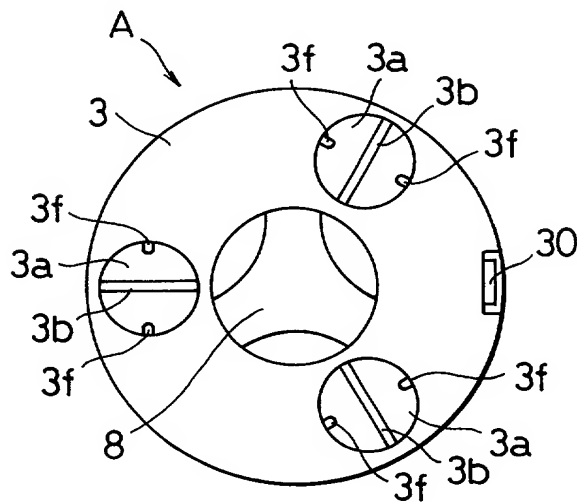

10019290.010402

9/14

FIG. 21


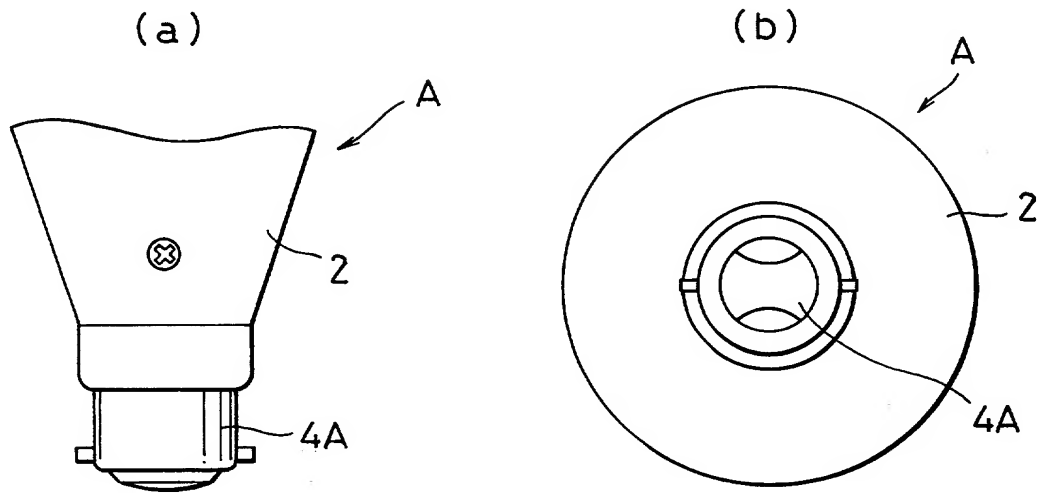


FIG. 22

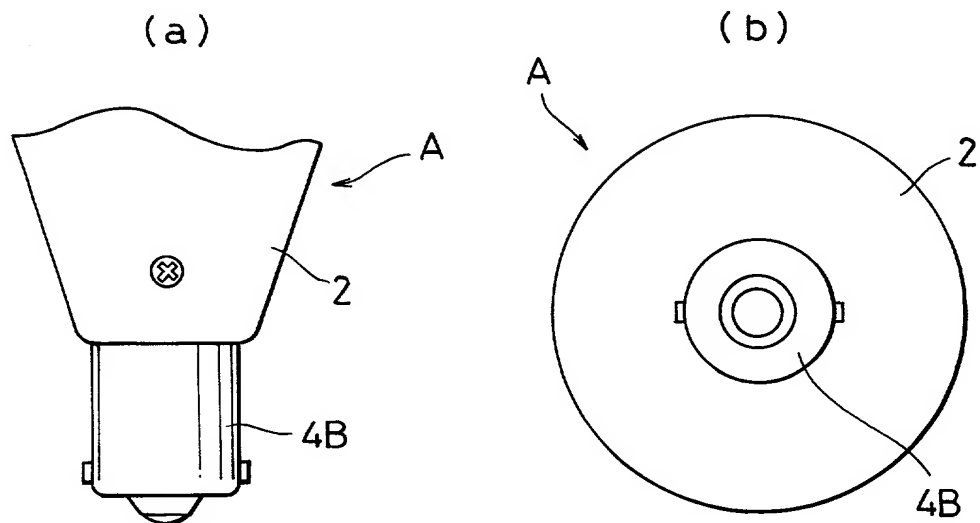

204070" 0626T001

10/14

FIG. 23

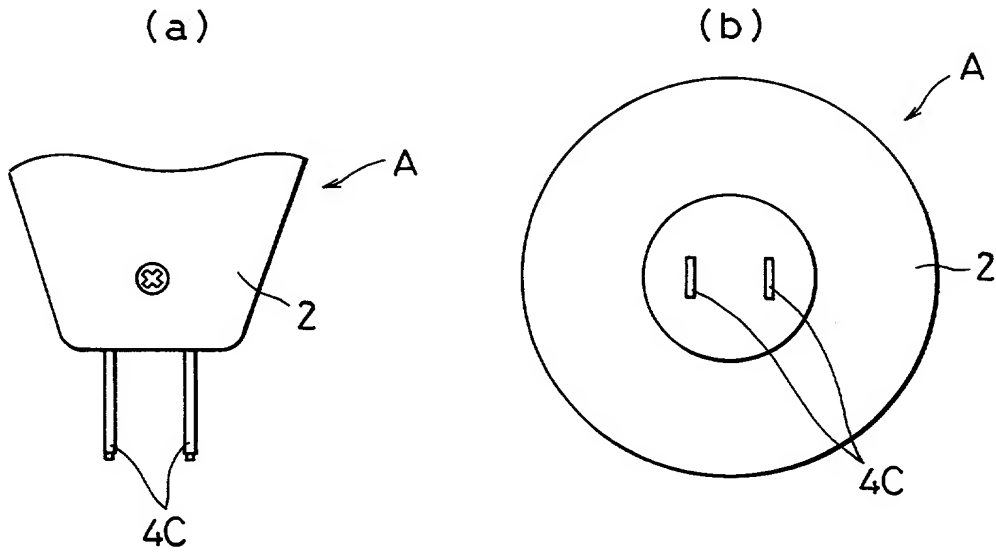


FIG. 24

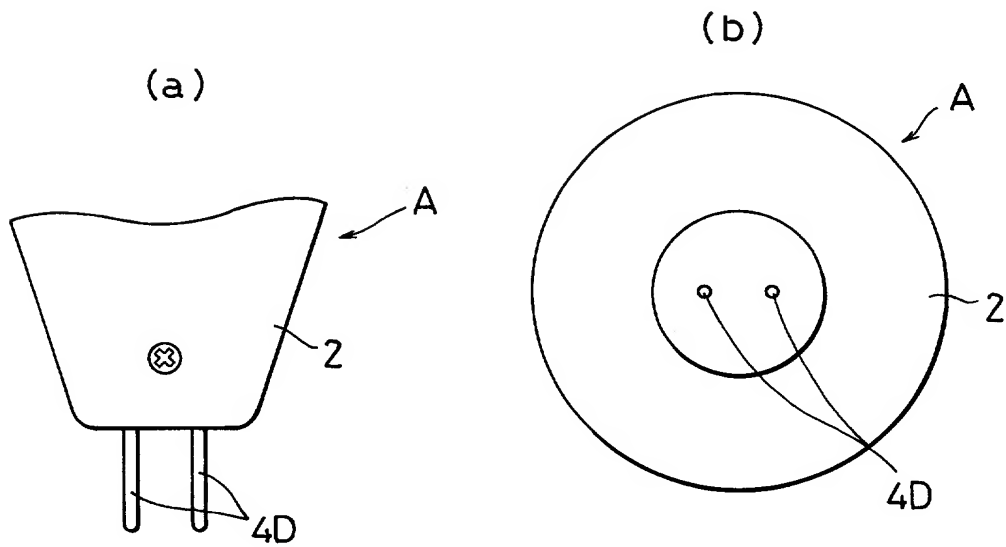


FIG. 25 11/14



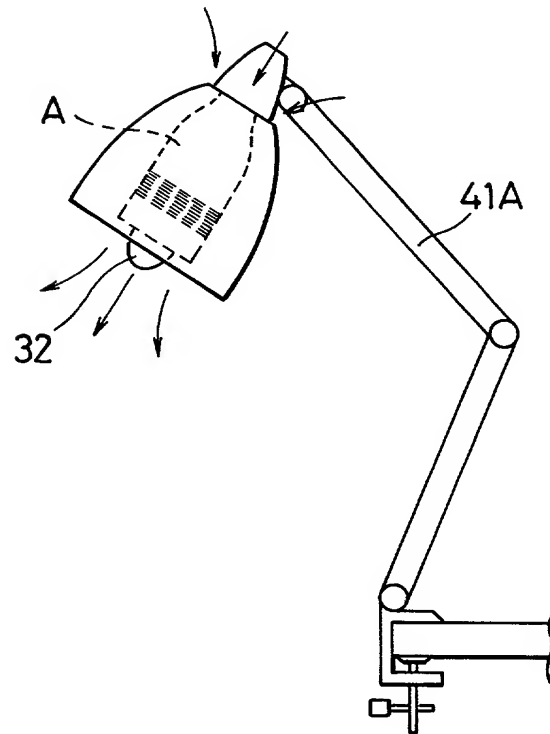


FIG. 26

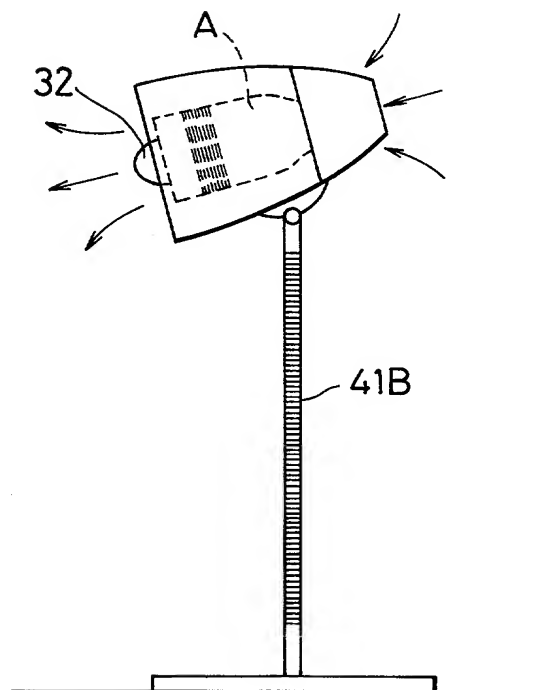

12/14

FIG.27

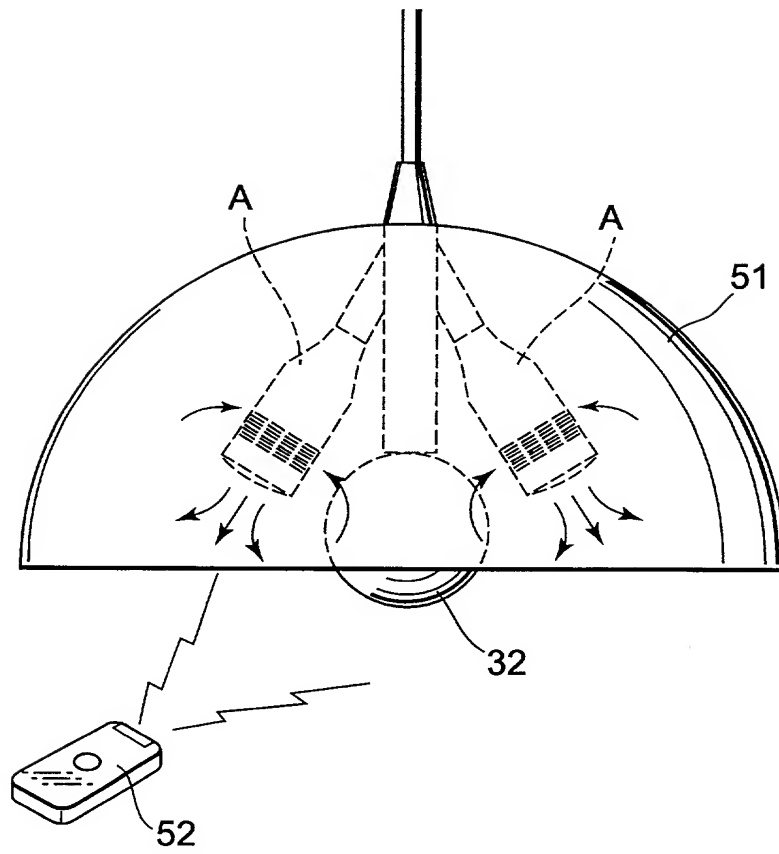

10019290.010402

13/14

FIG.28

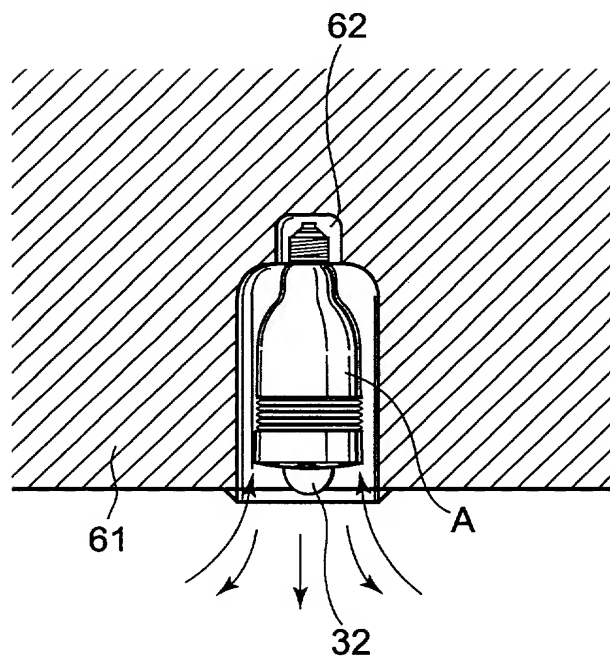


FIG.29(a)


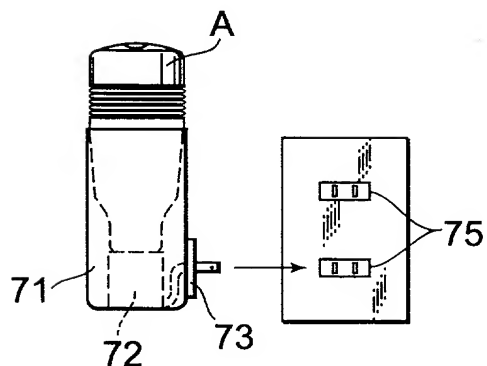


FIG.29(b)

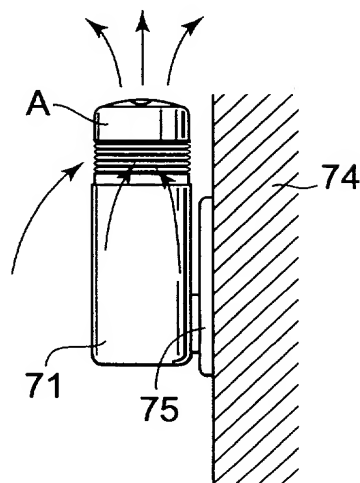

14/14

FIG.30


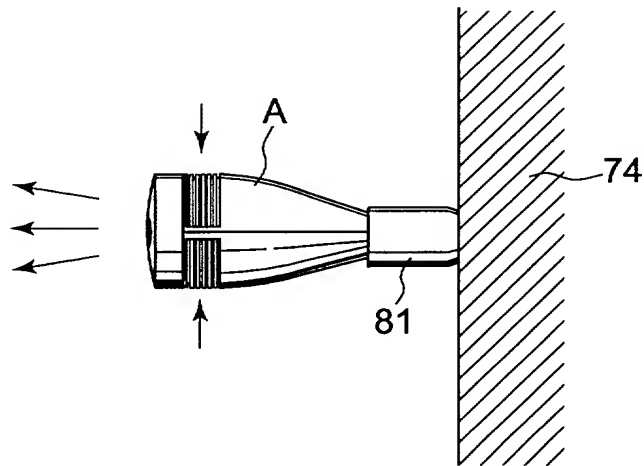


FIG.31

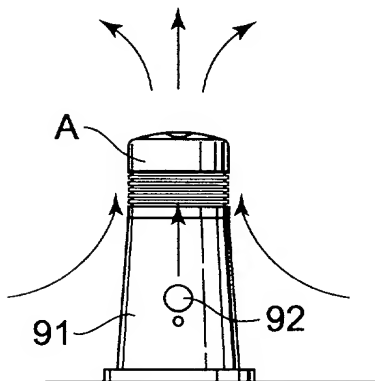

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、郵便の宛先、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者（下記の名称が複数の場合）であると信じています。

上記発明の明細書は、

☐ 本書に添付されています。

☐ _____ 月 _____ 日に提出され、米国出願番号または特許協定条約国際出願番号を

_____ とし、

(該当する場合) _____ に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第 37 編第 1 条 56 項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that

My residence, mailing address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled.

AIR CLEANER

the specification of which

☒ is attached hereto.

☒ was filed on July 4, 2000

as United States Application Number or PCT International Application Number

PCT/JP00/04442 and was amended on

_____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第 35 編 119 条(a) - (d)項又は 365 条 (b) 項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約 365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)
外国での先行出願

Hei 11-190817 (Number) 番号)	JAPAN (Country) 国名)
2000-30900 (Number) 番号)	JAPAN (Country) 国名)

私は、第 35 編米国法典 119 条 (e) 項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第 35 編 120 条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約 365 条 (c) に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第 35 編 112 条第 1 項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第 37 編 1 条 56 項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.) (出願番号)	(Filing Date) (出願日)
(Application No.) (出願番号)	(Filing Date) (出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第 18 編第 1001 条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, § 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Claimed
優先権主張

5 / July / 1999 (Day/Month/Year Filed) 出願年月日)	<input checked="" type="checkbox"/> Yes はい	<input type="checkbox"/> No いいえ
8 / February / 2000 (Day/Month/Year Filed) 出願年月日)	<input checked="" type="checkbox"/> Yes はい	<input type="checkbox"/> No いいえ

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration (日本語宣言書)

委任状：私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。

(弁理士、または代理人の指名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: (list name and registration number)



022850

書類送付先

Send Correspondence to:



022850

直接電話連絡先：(名前及び電話番号)

Direct Telephone calls to: (name and telephone number)

(703) 413-3000

単独発明者または第一の共同発明者の氏名	1-00	Full name of sole or first inventor	
発明者の署名	日付	Inventor's signature	Date
		<i>Koji Anno</i>	December 3, 2001
住所		Residence	
		Tokyo, JAPAN	JPX
国籍		Citizenship	
		JAPAN	
郵便の宛先		Mailing Address	
		23-13 Matsubara 3-chome, Setagaya-ku,	
		Tokyo 156-0043 JAPAN	

第二の共同発明者の氏名		Full name of second joint inventor, if any	
第二の共同発明者の署名	日付	Second inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Mailing Address	

第三以降の共同発明者についても同様に記載し、署名すること)

(Supply similar information and signature for third and subsequent joint inventors.)

10049290 010403